

DM28001007-01




www.catpowertools.com

©2025 Caterpillar. CAT, CATERPILLAR, their respective logos, "Caterpillar Yellow," the "Power Edge" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.



CATALOGUE

LET'S DO THE WORK.™

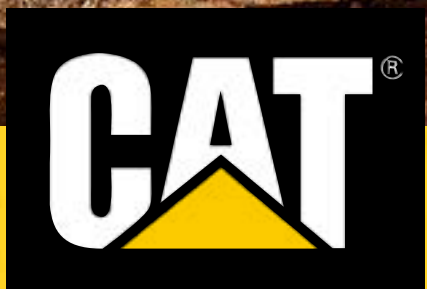

CAT® POWER TOOLS
FROM THE BRAND
YOU CAN TRUST

In every corner of the world ,you'll find a Cat® machine.

Cat® is recognized as the leader in building and construction. Globally, the Cat® logo has become an icon, often worn as a badge symbolizing grit, toughness and a get-it-done attitude.

Cat®products are engineered for superior performance, designed to last, and backed by the largest, most experienced dealer support network in the world.

CONTENTS



18V POWER TOOLS [⊕]
P20-35



12V POWER TOOLS [⊕]
P36-38



AC POWER [⊕]
P39-62



ACCESSORY
P63-75
































































18V GARDEN TOOLS [⊕]
P76-87



60V MAX GARDEN TOOLS [⊕]
P88-118

ICONS GUIDE

| | | | | | | | |
|---|--|---|--|---|---|---|---|
|  Brushless motor |  Max torque |  Chuck capacity |  No load speed |  Blade bore size |  Drilling capacity |  LCD display |  Temperature |
|  3 Speed setting |  Chuck capacity |  5 function: Drill/Hammer drill/Chisel/Chisel Bit Rotation/Tile drilling |  Impact energy |  2 Positions airflow |  Chuck capacity |  Light weight design |  Bevel capacity adjustment |
|  TOOL-FREE quick change system |  Rated power |  Disc size |  Tool free change system |  Oscillation working angle |  LED light |  Torque setting |  Speed setting |
|  Rotary rear handle |  Spindle thread |  Compact slim body design |  Blade size |  Patented cyclone dust collection |  Quick guard adjustment |  Micro depth adjustment |  USB power output |
|  Bevel capacity |  Max cutting depth |  4 position pendulum function |  Stoke length |  Aluminum gear box |  Belt size |  Quick release belt change |  Anti-Vibration |
|  Sanding base diameter |  Orbital diameter (Rotary sander) |  Hook & Loop system |  Micro cutting depth adjustment |  Light |  Working time |  Brightness Level |  Variable speed with reverse |
|  Max. rebate depth |  Left & Right dust ejection |  FM/DAB FM/DAB function |  Dustproof / waterproof |  Base size (Sheet sander) |  Orbital diameter (Sheet sander) |  Soft start |  Constant speed |
|  Bluetooth input |  Loudspeaker power |  Sanding and Polishing 2in1 function |  Spindle lock |  UNIVERSAL FIT SYSTEM Universal interface fit for all brand oscillating blade | | | |



ForAll **ONE BATTERY** ⁺

POWER ⁺
TOOLS

18V ⁺
LI-ION
ALL TOOLS

GARDEN ⁺
TOOLS



8.0Ah | 18V 8.0AH BATTERY TECHNOLOGY



ICE CONTROL

1/ Exclusive cooling frame with ***TES** material design keep cell cool under heavy load, deliver **15%** longer running time.

* TES: Thermal energy storage, TES material can absorb and store the heat of the battery ,release the heat when the ambient temperature is lower than its temperature.




NEW GENERATION BATTERY CELL

More power

1/ **40%** enhanced power deliver better performance for tough job

More compact

2/ **25%** lighter weight and **10%** more compact design (compare with 18650 cell for the same capacity)

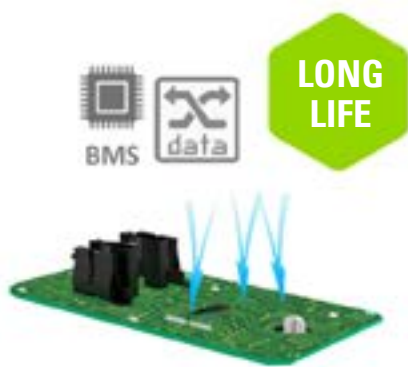

ADVANCED BMS CONTROL SYSTEM

Keep communicate with tool and charger to optimize battery life by actively controlling current, voltage and temperature.

DXB8HP 18V 8.0Ah Battery Pack



SPECIFICATIONS

| | |
|-------------------|--------------------------------------|
| Voltage: | 18V |
| Battery capacity: | 8.0Ah Li-ion |
| Charging time: | 40mins (Work with Charger DXC152) |
| Machine weight: | 1.03Kg |

DXB4 4.0Ah Battery Pack



SPECIFICATIONS

| | |
|-------------------|---|
| Voltage: | 18V |
| Battery capacity: | 4.0Ah Li-ion |
| Charging time: | 30mins(Work with Charger DXC15) 20mins(Work with Charger DXC152) |
| Machine weight: | 0.65Kg |

DXB2 18V 2.0Ah Battery Pack



SPECIFICATIONS

| | |
|-------------------|---|
| Voltage: | 18V |
| Battery capacity: | 2.0Ah Li-ion |
| Charging time: | 30mins(Work with Charger DXC15) 20mins(Work with Charger DXC152) |
| Machine weight: | 0.37Kg |

DA18099 18V 2.0A USB Adapter



SPECIFICATIONS

| | |
|-----------------|-------|
| Output voltage: | 5V |
| Output current: | 2.0A |
| Charging port: | Dual |
| Machine weight: | 0.1Kg |

DXB26 12V 2.0Ah Battery Pack

SPECIFICATIONS

| | |
|-------------------|--------------|
| Voltage: | 12V |
| Battery capacity: | 2.0Ah Li-ion |
| Machine weight: | 0.18Kg |



charge

INTELLIGENT PCB CONTROL

The charger communicates with the battery by intelligent PCB control throughout the charging process to optimize battery life by actively controlling current, voltage and temperature.



Max. Output Current
15.0A



Power
380W



Quick Charge
88MIN
(2pc 8.0Ah Batteries)



Cooling Fan

DXC152



DXC152

18V 15.0A Dual Port Charger



SPECIFICATIONS

| | |
|----------------------|--|
| Nominal voltage: | 18V |
| Max. Output Current: | 15.0A |
| Power: | 380W |
| Charging time: | 2.0Ah(DXB2)/4.0Ah(DXB4) 8.0Ah (DXB8HP) 40mins |
| Machine weight: | 1.38Kg |

DXC2

18V 2.0A Charger



SPECIFICATIONS

| | |
|----------------------|---|
| Output voltage: | 18V |
| Max. Output Current: | 2.0A |
| Input Power: | 48W |
| Charging time: | 2.0Ah (DXB2) 80 mins 4.0Ah (DXB4) 140 mins |
| Machine weight: | 0.30Kg |

DXC4

18V 4.0A Charger



SPECIFICATIONS

| | |
|----------------------|--|
| Output voltage: | 18V |
| Max. Output Current: | 4.0A |
| Power: | 95W |
| Charging time: | 2.0Ah (DXB2) 35 mins 4.0Ah (DXB4) 68 mins |
| Machine weight: | 0.40Kg |

DXC42

18V 4.0A Dual Charger



SPECIFICATIONS

| | |
|----------------------|--|
| Output voltage: | 18V |
| Max. Output Current: | 4.0A |
| Input Power: | 105W |
| Charging time: | 2.0Ah (DXB2) 30 mins 4.0Ah (DXB4) 60 mins |
| Machine weight: | 0.40Kg |

DXC15

18V 15.0A Fast Charger



SPECIFICATIONS

| | |
|----------------------|--|
| Nominal voltage: | 18V |
| Max. Output Current: | 15.0A |
| Power: | 380W |
| Charging time: | 2.0Ah (DXB2) 30mins 4.0Ah (DXB4) 30mins |
| Machine weight: | 1.18Kg |

DXC26

12V 1.5A Charger

SPECIFICATIONS

| | |
|-------------------|-----------------------|
| Output voltage: | 13V |
| Charging current: | 1.5A |
| Input Power: | 24W |
| Charging time: | 2.0Ah (DXB26) 80 mins |
| Machine weight: | 0.20Kg |



BRUSHLESS MOTOR

Best-in-class brushless motor and precise electrical control technology deliver the ultimate performance, durability and run-time.

25%
More Power

50%
Efficiency

10X
Longer Motor Life



This Data/Document/Program is the exclusive property of Positec Technology (China) Co.Ltd.Without their consent it may not reproduced or given to third parties.

STORAGE SYSTEM

3 PIECES
FULL
STORAGE

- Tool Box DA41002
- Larger Tool Box DA41003
- Rolling Tool Box DA41004
- + Storage Box System DA41005

250 LBS
WEIGHT CAPACITY



**MODULAR
DESIGN**



**IP65
WATER
PROOF**



**IMPACT
RESISTANCE
QUALITY**





DA41005

Storage Box System

- MODULAR
DESIGN
- IMPACT
RESISTANCE
QUALITY
- IP65
WATER
PROOF
- 9-INCH
WHEELS
- INNOVATIVE
LOCKING
CONSTRUCTION



| Outside Size | Storage Capacity | Weight Capacity | Wheels | IP Rating |
|---------------|------------------|-----------------|--------------|-----------|
| 855X550X590mm | 125.3L | 425LBS | 9 Inch 230mm | IP65 |

DA41002

Tool Box

- MODULAR
DESIGN
- IMPACT
RESISTANCE
QUALITY
- IP65
WATER
PROOF
- INNOVATIVE
LOCKING
CONSTRUCTION



| Inside Size | Outside Size | Storage Capacity | Weight Capacity | IP Rating |
|---------------|---------------|------------------|-----------------|-----------|
| 512X330X133mm | 554X418X168mm | 22.5L | 75LBS | IP65 |

DA41003

Larger Tool Box






- MODULAR
DESIGN
- IMPACT
RESISTANCE
QUALITY
- IP65
WATER
PROOF
- INNOVATIVE
LOCKING
CONSTRUCTION



| Inside Size | Outside Size | Storage Capacity | Weight Capacity | IP Rating |
|---------------|---------------|------------------|-----------------|-----------|
| 512X253X330mm | 554X418X288mm | 42.8L | 100LBS | IP65 |

DA41004

Rolling Tool Box

- MODULAR
DESIGN
- INNOVATIVE
LOCKING
CONSTRUCTION
- IMPACT
RESISTANCE
QUALITY
- IP65
WATER
PROOF
- 9-INCH
WHEELS




| Inside Size | Outside Size | Storage Capacity | Weight Capacity | Wheels | IP Rating |
|---------------|---------------|------------------|-----------------|--------------|-----------|
| 560X522X655mm | 512X355X330mm | 60L | 250LBS | 9 Inch 230mm | IP65 |




DX1060


18V BL 50N.m Drill Driver




Brushless Motor




13mm




50N.m




0-450/0-1900/min



Variable Speed



Torque 20+1



LED

FEATURE

- Brushless motor
- Two speed gear box
- Single sleeve metal chuck
- Belt clip


- Variable speed with reverse
- Rubber over mould grip
- Auto spindle lock
- LED light

SPECIFICATIONS

| | | | |
|---------------|------------------|----------------------------|------------|
| Voltage | 18V | Number of clutch positions | 20+1 |
| Chuck size | 13mm Metal | Max cutting capacity | wood 35mm |
| No load speed | 0-450/0-1900/min | | metal 13mm |
| Max torque | 50N.m | | |


ACCESSORIES

- 2pc 2.0Ah Li-ion battery pack
- 1pc 2A Charger
- 1pc Belt clip
- Injection Box +Color Sticker




DX1010


18V BL 50N.m Impact Drill




Brushless Motor




13mm




50N.m




0-450/0-1900/min



Variable Speed



Torque 20+1+1



LED

FEATURE

- Brushless motor
- Two speed gear box
- Single sleeve metal chuck
- Belt clip


- Variable speed with reverse
- Rubber over mould grip
- Auto spindle lock
- LED light

SPECIFICATIONS

| | | | |
|---------------|--------------------|----------------------------|---------------|
| Voltage | 18V | Number of clutch positions | 20+1+1 |
| Chuck size | 13mm Metal | Max cutting capacity | wood 35mm |
| No load speed | 0-450/0-1900/min | | metal 13mm |
| Impact rate | 0-7600/0-32000 bpm | | concrete 13mm |
| Max torque | 50N.m | | |

ACCESSORIES

- 2pc 2.0Ah Li-ion battery pack
- 1pc 2A Charger
- 1pc Belt clip
- Injection Box +Color Sticker



21

DX1100 18V BL 65N.m Drill Driver



FEATURE

- Brushless motor
- Two speed gear box
- Single sleeve metal chuck
- Variable speed with reverse
- LED light
- High torque 65N.m for tough application
- Rubber over mould grip
- Auto spindle lock

SPECIFICATIONS

| | | | |
|---------------|------------------|----------------------------|------------|
| Voltage | 18V | Number of clutch positions | 18+1 |
| Chuck size | 13mm | Max cutting capacity | wood 40mm |
| No load speed | 0-500/0-2000/min | | metal 13mm |
| Max torque | 65N.m | | |

ACCESSORIES

2pc 2.0Ah Li-ion battery pack
1pc 4A Charger
1pc Belt clip
Injection Box+Color box



DX1120 18V BL 65N.m Impact Drill



FEATURE

- Brushless motor
- Two speed gear box
- Single sleeve metal chuck
- Variable speed with reverse
- High torque 65N.m for tough application
- Rubber over mould grip
- Auto spindle lock
- LED light

SPECIFICATIONS

| | | | |
|---------------|--------------------|----------------------------|--------------|
| Voltage | 18V | Number of clutch positions | 22+1+1 |
| Chuck size | 13mm | Max cutting capacity | wood 40mm |
| No load speed | 0-500/0-2000/min | | metal 13mm |
| Impact rate | 0-8000/0-32000 bpm | | masonry 16mm |
| Max torque | 65N.m | | |

ACCESSORIES

2pc 2.0Ah Li-ion battery pack
1pc 4A Charger
1pc Belt clip
Injection box+Color box



DX1130 18V BL 80N.m Impact Drill



FEATURE

- Brushless motor
- Two speed gear box
- Variable speed with reverse
- Auto spindle lock
- Durable auxiliary handles to protect users from kickback
- High torque 80N.m for tough application
- Rubber over mould grip
- Single sleeve metal chuck
- LED light

SPECIFICATIONS

| | | | |
|---------------|-------------------|----------------------------|--------------|
| Voltage | 18V | Number of clutch positions | 22+1+1 |
| Chuck size | 13mm | Max cutting capacity | wood 55mm |
| No load speed | 0-550/0-2200/min | | metal 13mm |
| Impact rate | 0-10450/41800 bpm | | masonry 16mm |
| Max torque | 80N.m | | |

ACCESSORIES

1pc 4.0Ah Battery pack
1pc 4A Charger
1pc Auxiliary handle
1pc Belt clip
Injection box+Color box



DX145 18V 50N.m Drill Driver



FEATURE

- Two speed gear box
- Auto spindle lock
- Rubber over mould grip
- Single sleeve metal chuck
- Variable speed with reverse
- LED light
- With belt clip

SPECIFICATIONS

| | | | |
|---------------|----------------|----------------------------|------------|
| Voltage | 18V | Number of clutch positions | 20+1 |
| Chuck size | 13mm | Max cutting capacity | wood 35mm |
| No load speed | 0-400/1600/min | | metal 13mm |
| Max torque | 50N.m | | |

ACCESSORIES

1pc 2.0Ah Li-ion battery pack
1pc 2A Charger
1pc Belt clip
1pc Double ended bits (PH2 / SL5.5)
Injection Box +Color Sticker



DX155 18V 50N.m Impact Drill



FEATURE

- Two speed gear box
- Auto spindle lock
- Rubber over mould grip
- Single sleeve metal chuck
- Variable speed with reverse
- LED light
- With belt clip

SPECIFICATIONS

| | | | |
|---------------|-------------------|----------------------------|---------------|
| Voltage | 18V | Number of clutch positions | 20+3 |
| Chuck size | 13mm | Max cutting capacity | wood 35mm |
| No load speed | 0-400/0-1600/min | | metal 13mm |
| Impact rate | 0-6800/0-27200bpm | | concrete 13mm |
| Max torque | 50N.m | | |

ACCESSORIES

1pc 2.0Ah Li-ion battery pack
1pc 2A Charger
1pc Belt clip
1pc Double ended bits (PH2 / SL5.5)
Injection Box +Color Sticker







DXK201

18V 2in1 Combo Kit (Impact Drill & Impact Driver)


DX1120




Brushless Motor




13mm




65N.m



0-500/0-2000/min




Variable Speed




Torque 22+1+1


DX7030




Brushless Motor




1/4" HEX




215N.m



0-1300/2100/3200/min



Variable Speed



3-SPEED


FEATURE

DX1120

- Impact function
- High torque 65N.m for tough application
- Rubber over mould grip
- Single sleeve metal chuck
- Variable speed with reverse


DX7030

- 3-Speed design
- Variable speed with reverse
- Rubber over mould grip
- LED light with Pre-light function for work area
- Convenient belt clip frees hands for multitasking




DX7030


18V BL 215N.m Impact Driver




Brushless Motor




1/4" HEX




215N.m




0-1300/2100/3200/min



Variable Speed



LED



3-SPEED

FEATURE

- Brushless motor
- Variable speed with reverse
- LED light with Pre-light function for work area
- Convenient belt clip frees your hands for multitasking
- 3-Speed design
- Rubber over mould grip

SPECIFICATIONS

| | |
|---------------|----------------------|
| Voltage | 18V |
| Chuck size | ¼" Hex |
| No load speed | 0-1300/2100/3200/min |

| | |
|-------------|---------------------|
| Impact rate | 0-1600/2900/3600bpm |
| Max torque | 215N.m |


ACCESSORIES

2pc 2.0Ah Li-ion battery pack

1pc 4A Charger


1pc Belt clip

Injection box+Color box




DX7060


18V BL 350N.m Impact Wrench




Brushless Motor




1/2"




350N.m




0-1300/2100/3200rpm



Variable Speed



LED



3-SPEED

FEATURE

- Brushless motor
- Rubber over mould grip
- Convenient belt clip frees your hands for multitasking
- LED with Pre-light function for work area
- Variable speed with reverse
- 3-Speed design

SPECIFICATIONS

| | |
|---------------|---------------------|
| Voltage | 18V |
| Chuck size | ½" |
| No load speed | 0-1300/2100/3200rpm |

| | |
|-------------|---------------------|
| Impact rate | 0-1300/2900/3600bpm |
| Max torque | 350N.m |

ACCESSORIES

2pc 4.0Ah Li-ion battery pack


1pc 4A Charger

1pc Belt clip

Injection box+Color box


1pc Steel O ring

1pc Dental pin for Anvil




DX7040B


18V 180N.m Impact Driver




1/4" HEX




180N.m



0-2900/min



Variable Speed



LED

FEATURE

- Rubber over mould grip
- Metal gear box
- Variable speed with reverse
- LED light
- Fitting with CAT battery


SPECIFICATIONS

| | |
|---------------|------------|
| Voltage | 18V |
| Chuck size | 1/4" Hex |
| No load speed | 0-2900/min |
| Impact rate | 0-3000bpm |
| Max torque | 180N.m |

ACCESSORIES


1pc Belt clip

Color box




DX7070B


18V 250N.m Impact Wrench




1/2"




250N.m



0-2900rpm



Variable Speed



LED

FEATURE

- Rubber over mould grip
- Metal gear box
- Variable speed with reverse
- LED light


SPECIFICATIONS

| | |
|---------------|-------------|
| Voltage | 18V |
| Chuck size | 1/2" Square |
| No load speed | 0-2900/min |
| Impact rate | 0-3000bpm |
| Max torque | 250N.m |

ACCESSORIES

1pc Belt clip

Color box



24

25

DX7020 18V BL 700N.m Mid Torque Impact Wrench



FEATURE

- Brushless motor
- 4-mode drive control with auto shut-off and bolt removal mode
- Rubber overmould grip
- Friction ring ensures quick and easy socket changes
- Variable speed with reverse
- Tri-LEDs delivers high definition lighting to increase workspace visibility with less shadows
- AI gear box

SPECIFICATIONS

| | | | |
|---------------|-------------------|----------------------|-------------------|
| Voltage | 18V | Impact rate | 1500/2300/2800bpm |
| Chuck size | ½" | Max breakaway torque | 800 N.m |
| No load speed | 1400/2000/2400rpm | Max fastening torque | 700 N.m |

ACCESSORIES

2pc 4.0Ah Li-ion battery pack
1pc 4A Charger
1pc Belt clip
Injection box +Color box



DX2120B 18V BL 2J SDS Rotary Hammer



FEATURE

- Brushless motor
- SDS-plus quick change system
- 4 in 1 function: drilling, hammering, bit rotation, chisel
- Rubber over mould grip
- Variable speed with reverse
- Compact and light design
- Overload protection
- LED light


SPECIFICATIONS

| | | | |
|---------------|------------|----------------------|---------------|
| Voltage | 18V | Impact energy | 2J |
| Chuck size | SDS Plus | Max cutting capacity | wood 28mm |
| No load speed | 0-1350/min | | metal 13mm |
| Impact rate | 0-4700bpm | | concrete 22mm |



ACCESSORIES

1pc Auxiliary handle
1pc Metal depth gauge
Color box

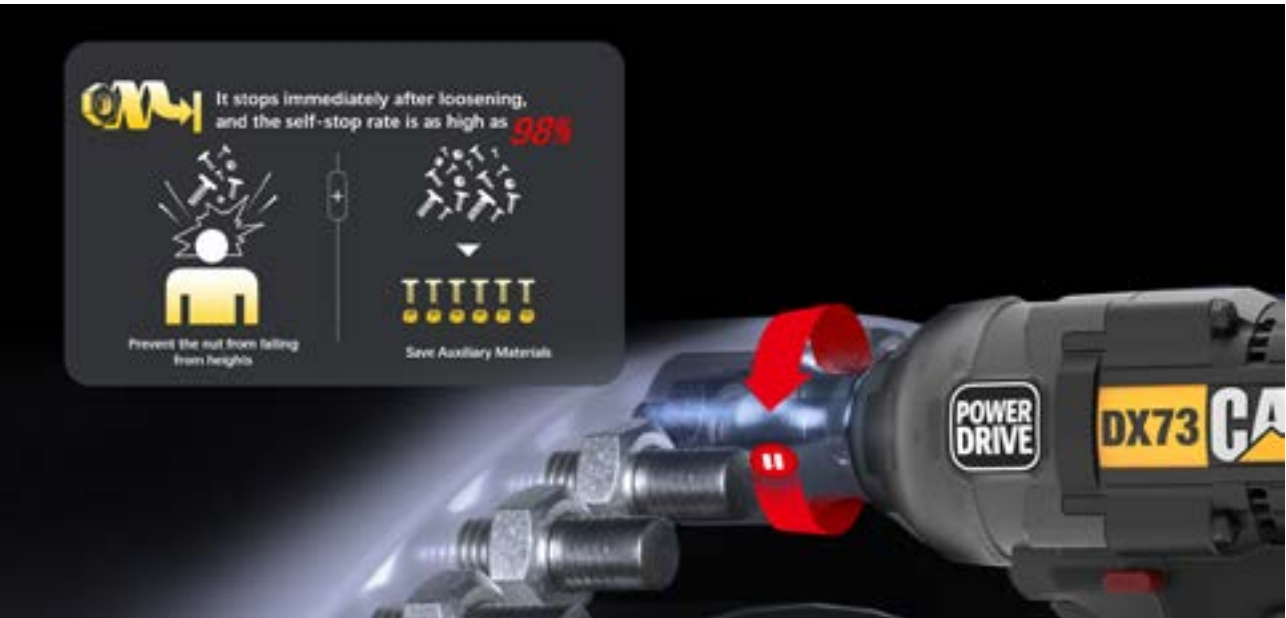

DX2150B 18V BL 2.2J SDS Rotary Hammer



FEATURE

- Brushless motor
- SDS-plus quick change system
- Forward and reverse rotation
- LED light
- Mechanical & electronic dual overload protection
- Variable speed with reverse
- Rubber overmould grip
- Anti-vibration design
- 4 function: hammer drill, bit rotation, chisel, impulse drilling

SPECIFICATIONS

| | | | |
|---------------|------------|-----------------------|---------------|
| Voltage | 18V | Impact force | 2.2J |
| Chuck type | SDS Plus | Max drilling capacity | steel 13mm |
| No load speed | 0-1080/min | | wood 32mm |
| Impact rate | 0-4800bpm | | concrete 26mm |



ACCESSORIES

1pc Auxiliary handle
1pc Metal depth gauge
Color box

DX73B 18V BL 1700N.m High Torque Impact Wrench



FEATURE

- Brushless motor
- Metal gear box with rubber cover
- Variable speed with reverse
- Constant torque function for consistent performance
- Electronic 3-stage impact power selection (Hard/Medium/Soft) with auto stop function in reverse mode
- LED light
- Rubber overmould grip
- Auto stop in nut reverse mode
- Most power torque in same class

SPECIFICATIONS

| | | | |
|---------------|----------------------|----------------------|------------------------|
| Voltage | 18V | Impact rate | 0-1000/1600/2400 bpm |
| Chuck size | ¾" | Max fastening torque | 700N.m/1000N.m/1700N.m |
| No load speed | 0-900/1100/1800 /min | Max breakaway torque | 800N.m/1100N.m/2100N.m |

ACCESSORIES

1pc Belt clip
Color box



DX3130B18V BL 125mm Angle Grinder



FEATURE

- Brushless motor
- 2 positions auxiliary handle
- Over load protection
- Soft start
- Quick guard adjustment
- Silde on/off switch
- Dust resistant with mesh filters
- Accidental start protection
- Slim body design ensure a secure grip at all times
- Electronic kickback protection technology

SPECIFICATIONS

| | | | |
|---------------|----------|---------------------------|--------|
| Voltage | 18V | Spindle thread | M14 |
| Disc Size | 125mm | Disc bore | 22.2mm |
| No load speed | 8500/min | Auxiliary handle position | 2 |

ACCESSORIES

1pc 2 in 1 quick guard
1pc Auxiliary handle
1pc Spanner
Color box
* 100mm/115mm available



DX3140B18V BL 125mm Angle Grinder



FEATURE

- Brushless motor
- Overload protection
- Soft start
- Tool-less quick safety guard adjustment
- Constant power
- Rubber over mould grip
- Dust resistant with mesh filters
- 3 position Anti-vibration auxiliary handle with spanner
- Slim body design with paddle switch for comfortable user experience

SPECIFICATIONS

| | | | |
|---------------|----------|---------------------------|--------|
| Voltage | 18V | Spindle thread | M14 |
| Disc Size | 125mm | Disc bore | 22.2mm |
| No load speed | 8500/min | Auxiliary handle position | 3 |

ACCESSORIES

1pc 2 in 1 quick guard
1pc Anti-vibration auxiliary handle
1pc Spanner
Color box
* 100mm/115mm available



DX3010B18V BL 125mm Angle Grinder



FEATURE

- Brushless motor
- 3 position Anti-vibration auxiliary handle with spanner
- Over load protection
- Soft start
- Quick guard adjustment
- Silde on/off switch
- Dust resistant with mesh filters
- Accidental start protection
- Constant speed
- Slim body design ensure a secure grip at all times
- Electric fast brake
- Electronic kickback protection technology
- Speed control 3000min to max 8600min

SPECIFICATIONS

| | | | |
|---------------|--------------------|---------------------------|--------|
| Voltage | 18V | Spindle thread | M14 |
| Disc Size | 125mm | Disc bore | 22.2mm |
| No load speed | 3000/5000/8600/min | Auxiliary handle position | 3 |

ACCESSORIES

1pc 2 in 1 quick guard
1pc Anti-vibration auxiliary handle
1pc Spanner
Color box
* 100mm/115mm available



DX5010B18V BL 120mm Circular Saw



FEATURE

- Brushless motor
- 0-45° bevel cutting adjustment
- Slim body design fits right in your hand
- Hex key on body design
- High no-load speed delivers smooth cut
- LED light for better sight in dark areas
- Spindle lock button for easy blade change
- Quick cutting depth adjustment for easy setting depth
- Multi cutting;Cuts wood,metal,tiles,plasterboard and plastics with ease

SPECIFICATIONS

| | | | |
|----------------|----------|----------------------|------------|
| Voltage | 18V | Bevel capacity | 0-45° |
| Blade size | 120mm | Max cutting capacity | 45° 29.5mm |
| No load speed | 6100/min | | 90° 41mm |
| Disc bore size | 9.5mm | | |

ACCESSORIES

1pc TCT Blade(24T)1pc HCS Blade(60T)
1pc Vacuum adaptor1pc Parallel guide
1pc Hex key
1pc Diamond Blade(60Grit)
Color box



DX5040B 18V BL 185mm Circular Saw



FEATURE

- Brushless motor
- Spindle lock
- Hex key storage
- Soft start & Overload protection & Electronic brake
- Magnesium alloy base & Aluminum guard for strong & light weight design
- Lock-off switch
- LED light
- Rubber over mould grip

SPECIFICATIONS

| | |
|----------------|----------|
| Voltage | 18V |
| Blade size | 185mm |
| No load speed | 8500/min |
| Disc bore size | 20mm |

| | |
|----------------------|----------|
| Bevel capacity | 0-56° |
| Max cutting capacity | 45° 46mm |
| | 90° 65mm |



ACCESSORIES

1pc Hex key 1pc Dust tube
1pc Vacuum adaptor
1pc 24T TCT blade
1pc Parallel guide
Color box

DX5300B 18V 24mm Jig Saw



FEATURE

- LED light
- Tool-free blade change system
- Rubber overmould grip
- 4 position pendulum function
- Spanner on body storage
- Variable speed
- Adjustable base for angle cutting
- Lock-off switch
- Steel base plate

SPECIFICATIONS

| | |
|----------------|------------|
| Voltage | 18V |
| Stroke length | 24mm |
| No load speed | 0-2500/min |
| Bevel capacity | 0-45° |

| | |
|----------------------|-----------|
| Max cutting capacity | wood 80mm |
| | steel 8mm |
| Pendulum function | 4 stages |



ACCESSORIES

1pc Blade for wood
1pc Dust tube
1pc Allen key
Color box

DX5330B 18V 165mm Circular Saw



FEATURE

- Spindle lock
- Lock off switch
- Rubber over mould grip
- Dust extraction
- Steel base
- Aluminum guard

SPECIFICATIONS

| | |
|----------------|----------|
| Voltage | 18V |
| Blade size | 165mm |
| No load speed | 4500/min |
| Bevel capacity | 0-50° |

| | |
|----------------------|----------|
| Max cutting capacity | 45° 38mm |
| | 90° 55mm |
| Disc bore size | 20mm |



ACCESSORIES

1pc Hex key 1pc Parallel guide
1pc Vacuum adaptor
1pc 24T saw blade
1pc Dust tube
Color box

DX5050B 18V BL 29mm Reciprocating Saw



FEATURE

- Brushless motor
- Aluminum gear box
- Tool-free blade change system
- Tool-Less pivot foot plate adjustment
- Metal rafter hook
- Tool free shoe adjustment
- Variable speed
- Pendulum function
- Rubber over mould grip
- LED light

SPECIFICATIONS

| | |
|---------------|------------|
| Voltage | 18V |
| Stroke length | 29mm |
| No load speed | 0-3000/min |

| | |
|----------------------|------------|
| Max cutting capacity | wood 300mm |
| | metal 12mm |



ACCESSORIES

1pc Blade for wood
1pc Rater hook
Color box

DX5270B 18V BL 26mm Jig Saw



FEATURE

- Brushless motor
- Tool-free base bevel adjustment
- Rubber over mould grip
- Lock-off switch prevents accidental starting
- 4-Stage Pendulum settings for improved cutting efficiency
- Variable speed
- Tool-free blade change system
- SDS Adjustable base for angle cutting

SPECIFICATIONS

| | |
|----------------|------------|
| Voltage | 18V |
| Stroke length | 26mm |
| No load speed | 0-3500/min |
| Bevel capacity | 0-45° |

| | |
|----------------------|---------------|
| Max cutting capacity | wood 120mm |
| | steel 10mm |
| | PVC pipe 20mm |



ACCESSORIES

1pc Blade for wood 1pc Vacuum adaptor
1pc Dust adapter 1pc Dust tube
1pc Parallel guide
1pc Base cover
Color box

DX5060B 18V 20mm Reciprocating Saw



FEATURE

- Variable speed
- Tool-Less pivot foot plate adjustment
- Rubber overmould grip
- Lock off switch
- Fitting with CAT battery
- Tool-Less blade change system
- Tool free shoe adjustment

SPECIFICATIONS

| | |
|----------------------|------------|
| Voltage | 18V |
| No load speed | 0-3000/min |
| Stroke length | 20mm |
| Max cutting capacity | steel 10mm |
| | wood 100mm |



ACCESSORIES

1pc Blade for wood
Color box

DX82B

18V BL Palm Router



- FEATURE
- Brushless Motor with constant speed technology
 - Aluminum base
 - Soft start
 - On/off switch
 - Rubber overmould grip
 - Accidental start protection
 - Variable speed
 - Micro depth adjustment
 - Spindle lock
 - LED light

SPECIFICATIONS

| | |
|---------------|-----------------|
| Voltage | 18V |
| Chuck size | ¼" |
| No load speed | 10000-30000/min |
| Plunge depth | 38mm |



- ACCESSORIES
- 1pc 13mm&17mm double end wrench
 - 1pc Trimmer base(with standard plastic plate)
 - 1pc Straight edge guide
 - 1pc Dust shroud
 - 1pc Vacuum adaptor
 - 1pc ¼" Collet
 - 1pc Template guide



DX41B

18V BL SDS Oscillating Multi Tool



- FEATURE
- Brushless motor
 - Slim body design
 - Tool less system for changing accessories
 - Universal interface fit for all brand all oscillating accessories
 - Multi-function finishing, detail and corner sanding
 - Variable speed control
 - Rubber over mould grip
 - Dual LED light

SPECIFICATIONS

| | |
|-------------------|----------------|
| Voltage | 18V |
| Oscillation angle | 4.0° |
| No load speed | 8000-19000/min |



- ACCESSORIES
- 9pc Sanding sheet(40#/80#/120#)
 - 1pc HSS segment saw blade
 - 1pc Rigid scraping blade
 - 1pc Sanding base
 - 1pc Wood plunge cutting blade
 - 1pc Metal cutting blade
 - Color box

DX43B

18V BL 125mm Rotary Sander



- FEATURE
- Brushless motor
 - Hook and loop system
 - Rubber overmould grip
 - Sanding & polishing 2in1 function
 - Pad brake system
 - Variable speed control
 - Dust collection system
 - On/off switch

SPECIFICATIONS

| | |
|------------------|-----------------|
| Voltage | 18V |
| No load speed | 8000-12000 /min |
| Orbital diameter | 3.2mm |
| Base size | 125mm |



- ACCESSORIES
- 1pc Dust bag
 - 1pc 150mm polishing foam pad
 - 3pc Sanding paper(60#/80#/120#)
 - Color box



DX42B

18V 125mm Rotary Sander



- FEATURE
- Sanding and polishing 2 in 1 function
 - Variable speed control
 - On/off switch
 - Pad brake system
 - Rubber over mould grip
 - Hook and loop & clamp system
 - Dust collection system

SPECIFICATIONS

| | |
|------------------|--|
| Voltage | 18V |
| Base size | 125mm(for Sanding) 150mm(for Polishing) |
| No load speed | 3000-11000/min |
| Orbital diameter | 2.4mm |



- ACCESSORIES
- 1pc Dust bag
 - 1pc 150mm polishing foam pad
 - 3pc Sanding paper(60#/80#/120#)
 - Color box

DX81B 18V BL Planer



FEATURE

- Brushless motor
- Right side dust ejection port
- With Rest stand
- Micro cutting depth adjustment
- Rubber over mould grip
- Overload protection
- Aluminum base with V-groove
- On board storage space for blade & wrench

SPECIFICATIONS

| | | | |
|-------------------|-----------|-------------------|------|
| Voltage | 18V | Max rebate depth | 8mm |
| Max cutting depth | 2mm | Max cutting width | 82mm |
| No load speed | 15500/min | | |

ACCESSORIES

1pc Rebate guide 1pc Dust bag
1pc Spanner 1pc Hex key
2pc TCT blades on machine
1pc Parallel guide
Color box



DX91B 18V Jobsite Blower



FEATURE

- Powerful with balance performance between air flow rate & air volume flow
- Rubber overmould grip
- ABS housing with TPE over-mould
- Blower function only
- Multi-accessories for versatile and flexible

SPECIFICATIONS

| | | | |
|----------------|----------------|---------------|------------------|
| Voltage | 18V | No load speed | Stage 1 11000RPM |
| Airflow speed | 179MPH / 80m/s | | Stage2 15000RPM |
| Machine weight | 1.3Kg Bare | | Stage 3 18000RPM |

ACCESSORIES

1pc Nozzle
1pc Extension tube
1pc Dust cover
2pc Deep hole nozzle
Color box



DX62B 18V Jobsite Worklight



FEATURE

- Flood light illumination pattern with Super bright / Energy-saving model
- COB LED light ensures a long service life and minimum heat generation to touch
- Flexible operation-360 degree head rotating to freely adjust lighting angle
- Battery powered and portable handle to carry away
- Sturdy light case for tripod mountable and a variety of other hanging methods
- Sealed water Proof switch

SPECIFICATIONS


| | |
|-------------|---------------|
| Voltage | 18V |
| Rated power | 20W |
| Lumen | 750/1600Lumen |
| Bulb type | LED |

ACCESSORIES

Color box



DX63B 18V Spot light



FEATURE

- LED light
- On/off switch with 2 level lumen setting
- Wrist Strap
- Rubber overmould grip
- Integrated hook for hands-free
- Adjustable rotate working head
- Magnetic holder

SPECIFICATIONS

| | |
|------------------|-----------------|
| Voltage | 18V |
| Brightness | 160/400 lumen |
| Adjustable angle | Rotating -10~95 |

ACCESSORIES

Color box



DX61B.1 18V Bluetooth Radio



FEATURE

- Tough & impact resistant
- USB power output for charging mobile phone
- Soft Antenna
- Compatible for 18V battery
- FM/AM (Auto Tune function & 5 stations memory)
- Aux input
- Bluetooth input
- Carry handle for easy transportation
- LCD display quality

SPECIFICATIONS

| | | | |
|-------------------|---------|------------------------|-------------|
| Voltage | 18V | FM frequency coverage | 87.5-108MHz |
| Loudspeaker Power | 2X5W | AM frequency coverage | 520-1710KHz |
| USB port output | 5V 1.0A | Dustproof / waterproof | IP54 |

ACCESSORIES

1pc AC power adaptor
Color box





12V POWER TOOLS

DX1140 12V BL 38N.m Compact Drill Driver



FEATURE

- Brushless motor
- Two speed gear box
- Single sleeve chuck
- LED battery capacity indicator
- LED light
- Rubber overmould grip
- Super compact design
- Variable speed with reverse
- Auto spindle lock

SPECIFICATIONS

| | | | |
|---------------|----------------|-----------------------|------------|
| Voltage | 12V | Max drilling capacity | steel 10mm |
| Chuck size | 10mm Plastic | | wood 25mm |
| No load speed | 0-400/1650 rpm | Clutch position | 20+1 |
| Max torque | 38N.m | | |

ACCESSORIES

2pc 2.0Ah Battery pack
1pc 1.5A Charger
Injection box + Color sticker



DX1160 12V BL 38N.m Compact Impact Drill



FEATURE

- Brushless motor
- Two speed gear box
- Single sleeve chuck
- LED battery capacity indicator
- LED light
- Rubber overmould grip
- Super compact design
- Variable speed with reverse
- Auto spindle lock

SPECIFICATIONS

| | | | |
|---------------|---------------------|-----------------------|---------------|
| Voltage | 12V | Max drilling capacity | steel 10mm |
| Chuck size | 10mm Plastic | | wood 25mm |
| No load speed | 0-400/1650 rpm | | Concrete 10mm |
| Impact rate | 0-6000/ 0-24750 bpm | Clutch position | 20+1+1 |
| Max torque | 38N.m | | |

ACCESSORIES

2pc 2.0Ah Battery pack
1pc 1.5A Charger
Injection box + Color sticker



DX14 12V 30N.m Drill Driver



FEATURE

- Compact and lightweight
- Variable speed with reverse
- Auto spindle lock
- Single sleeve chuck
- LED battery capacity indicator
- Two speed gear box
- LED light
- Rubber over mould grip

SPECIFICATIONS

| | | | |
|---------------|------------------|-------------------------|-----------|
| Voltage | 12V | Torque setting position | 15+1 |
| Chuck size | 10mm | Max cutting capacity | wood 20mm |
| Max torque | 30N.m | | metal 8mm |
| No load speed | 0-400/0-1500/min | | |

ACCESSORIES

1pc 2.0Ah Battery pack
1pc 1.5A Charger
Color box



DX15

12V 30N.m Impact Drill



FEATURE

- Compact and lightweight
- Two speed gear box
- Variable speed with reverse
- Soft grip handle
- LED light
- Auto spindle lock
- Single sleeve chuck

SPECIFICATIONS

| | |
|---------------|-------------------|
| Voltage | 12V |
| Chuck size | 10mm |
| Max torque | 30N.m |
| No load speed | 0-400/0-1500/min |
| Impact rate | 0-5800/0-22500bpm |

| | |
|-------------------------|-------------|
| Torque setting position | 18+1+1 |
| Max cutting capacity | wood 20mm |
| | metal 8mm |
| | masonry 8mm |



ACCESSORIES

- 1pc 2.0Ah Battery pack
- 1pc 1.5A Charger
- Color box



DX1110

4V 5N.m Screw Driver



FEATURE

- Soft grip handle
- Electronic torque adjustment function
- LED Charger indication
- Dual LED light
- Full metal gear box

SPECIFICATIONS

| | |
|---------------|----------|
| Voltage | 4V |
| No-load speed | 300/min |
| Max. torque | 5N.m |
| Chuck size | 1/4" hex |



ACCESSORIES

- 1pc Magnetic bit holder(60mm)
- 1pc 50 impact bit PH2
- 1pc USB Cable(Type C)
- 24pcs 25mm screwdriver bit
- Injection Plastic Box + Color Sleeve



DX2140

800W 3J SDS Plus Rotary Hammer



FEATURE

- SDS-plus chuck
- 4 functions:Drill, Hammer drill, Bit Rotation, Chisel
- Rubber overmould grip
- Lock-on switch
- Over load protection
- Forward and reverse rotation
- Variable speed

SPECIFICATIONS

| | | | | |
|---------------|------------------|------------------|----------------------|-------------------------|
| Model No. | DX2140 | DX2140U | Impact rate | 0-4900bpm |
| Power | 800W | 800W | Impact energy | 3J |
| Voltage | 220-240V~50/60Hz | 110-127V~50/60Hz | Max cutting capacity | wood 30mm |
| No-load speed | | 0-1150/min | | masonry 26mm/metal 13mm |



ACCESSORIES

- 1pc Rubber auxiliary handle
- 1pc Metal depth gauge
- 1pc SDS drill bit
- BMC+Color box

DX2130

900W 3.2J SDS Plus Rotary Hammer



FEATURE

- SDS-plus chuck
- 4 functions:Drill, Hammer drill, Bit Rotation, Chisel
- Rubber overmould grip
- Lock-on switch
- Forward and reverse rotation
- Over load protection
- Variable speed

SPECIFICATIONS

| | | | | |
|---------------|------------------|------------------|----------------------|--------------|
| Model No. | DX2130 | DX2130U | Impact energy | 3.2J |
| Power | 900W | 900W | Max cutting capacity | wood 30mm |
| Voltage | 220-240V~50/60Hz | 110-127V~50/60Hz | | steel 13mm |
| No load speed | | 0-1100/min | | masonry 28mm |
| Impact rate | | 0-4800bpm | | |



ACCESSORIES

- 1pc Rubber auxiliary handle
- 1pc Metal depth gauge
- 3pcs SDS drill bits
- 2pcs Point chisels & flat chisels
- BMC+Color box

DX27

1500W 5J SDS Plus Rotary Hammer



FEATURE

- Anti-vibration main handle
- Lock-on switch
- SDS-plus quick-change system
- 4 Functions:Drill, Hammer drill, Bit Rotation, Chisel
- Ball joint cord connection for full protection of power cord
- Metal depth gauge
- Rubber over mould grip
- Variable speed control
- Magnesium alloy gear box

SPECIFICATIONS

| | | | | |
|---------------|---------------|------------------|----------------------|--------------|
| Model No. | DX27 | DX27U | Impact energy | 5J |
| Power | 1500W | 1500W | Max cutting capacity | wood 40mm |
| Voltage | 230-240V~50Hz | 110-127V~50/60Hz | | steel 13mm |
| No load speed | | 0-920/min | | masonry 32mm |
| Impact rate | | 4900bpm | Machine weight | 5.7Kg |



ACCESSORIES

- 1pc Auxiliary handle
- 1pc Depth gauge
- 1pc Dust cover
- BMC+Color box

DX25

1100W 8.5J SDS Max Rotary Hammer



FEATURE

- Super lightweight but excellent Drilling efficiency
- 2 function: hammering, hammer drilling
- Anti-vibration handle
- Forward and Reverse rotation
- Rubber overmould grip for improved comfort
- SDS-Max chuck
- Aluminum gear box
- Overload protection
- Auto stop carbon brush

SPECIFICATIONS

| | | | | |
|---------------|------------------|------------------|----------------|--------------|
| Model No. | DX25 | DX25U | Impact rate | 3950bpm |
| Power | 1100W | 1100W | Impact energy | 8.5J |
| Voltage | 220-240V~50/60Hz | 110-127V~50/60Hz | Capacity | masonry 40mm |
| No-load speed | | 580/min | Machine weight | 5.3Kg |



ACCESSORIES

- 1pc Auxiliary handle
- 1pc Depth gauge
- BMC+Color box



DX28

1100W 10J SDS Max Demolition Hammer



- FEATURE
- Light weight design
 - Hex chuck
 - Rubber over mould grip
 - Auxiliary handle
 - Four finger size big switch with lock-on feature
 - Magnesium alloy gear box

SPECIFICATIONS

| | | | | |
|-------------|------------------|---------------|----------------|----------|
| Model No. | DX28 | DX28U | Impact energy | 10J |
| Power | 1100W | 1100W | Chuck capacity | Hex 17mm |
| Voltage | 220-240V~50/60Hz | 110-127V~60Hz | Machine weight | 4.9Kg |
| Impact rate | 3500bpm | | | |



- ACCESSORIES
- 1pc Auxiliary handle
 - 1pc Spanner
 - 1pc Dust cap
 - BMC+Color box

DX2010

1200W 15J SDS Max Demolition Hammer



- FEATURE
- Lock-on switch
 - SDS-Max chuck
 - Anti-vibration design
 - Compact body
 - Larger touchable trigger to easy control
 - Ball joint cord connection for full protection of power cord

SPECIFICATIONS

| | | | | |
|-----------|------------------|---------------|----------------|---------|
| Model No. | DX2010 | DX2010U | Impact rate | 3500bpm |
| Power | 1200W | 1200W | Impact energy | 15J |
| Voltage | 220-240V~50/60Hz | 110-127V~60Hz | Machine weight | 6.1Kg |



- ACCESSORIES
- 1pc Spanner
 - 1pc Plastic container grease
 - 1pc Auxiliary handle
 - BMC+Color box



DX29

1750W 50J Demolition Hammer



- FEATURE
- Excellent Impact force
 - Constant Speed to prolong motor life
 - Auto-stop carbon brushes
 - Service reminder light
 - Magnesium gear box
 - Triple Anti-vibration to maximum enhanced comfortability

SPECIFICATIONS

| | | | | |
|-------------|------------------|---------------|----------------|----------|
| Model No. | DX29 | DX29U | Impact energy | 50J |
| Power | 1750W | 1750W | Chuck capacity | Hex 30mm |
| Voltage | 220-240V~50/60Hz | 110-127V~60Hz | Machine weight | 14.9Kg |
| Impact rate | 1620bpm | | | |



- ACCESSORIES
- 1pc Flat chisel
 - 1pc Point chisel
 - 1pc Auxiliary handle
 - 1pc Wiping cloth
 - 1pc Grease tube
 - BMC+Color box

DX18

2400W 180mm Diamond Core Drill



- FEATURE
- Lock off switch
 - Rubber overmould grip
 - Variable speed trigger
 - Mechanical & electronic dual overload protection
 - Eletric leakage protection
 - Also could work with Rig

SPECIFICATIONS

| | |
|-------------------|----------------|
| Power | 2400W |
| No load speed | 1400/min |
| Max Drilling Dia. | Bricks 180mm |
| | Concrete 102mm |
| Collet size | 1- 1/4" UNC |



- ACCESSORIES
- 1pc Shoulder bracket
 - 1pc Auxiliary handle
 - 1pair Carbon brush
 - 1pc Hex wrench
 - Color box

DX19

3500W 230mm Diamond Core Drill



- FEATURE
- Metal housing and steel gears for optimum durability
 - Lock off switch
 - Rubber overmould grip
 - Mechanical overload protection
 - Handles for easier to carry
 - Eletric leakage protection

SPECIFICATIONS

| | | | |
|---------------|-------------|-------------------|----------------|
| Power | 3500W | Max Drilling Dia. | Bricks 230mm |
| No-load speed | 750/min | | Concrete 127mm |
| Collet size | 1- 1/4" UNC | | |



- ACCESSORIES
- 1pc Rig stand set
 - 1pair Carbon brush
 - 1pc Hex wrench
 - Color box

DX175 600W 13mm Impact Drill



FEATURE

- Forward and reverse rotation
- Variable speed switch
- Lock-on switch
- Rubber over mould grip
- Plastic depth gauge

SPECIFICATIONS

| | | | | |
|---------------|------------------|------------------|-----------------------|--------------|
| Model No. | DX175 | DX175U | Chuck size | 13mm |
| Power | 600W | 600W | Max drilling capacity | wood 25mm |
| Voltage | 220-240V~50/60Hz | 110-127V~50/60Hz | | metal 10mm |
| No-load speed | | 0-3000/min | | masonry 13mm |
| Impact rate | | 0-48000bpm | Machine weight | 1.55Kg |

ACCESSORIES

1pc Auxiliary handle
1pc Depth gauge
1pc Chuck key
Color box



DX17 750W 13mm Impact Drill



FEATURE

- Forward and reverse rotation
- Variable speed switch
- Lock-on switch
- Rubber over mould grip
- Metal depth gauge

SPECIFICATIONS

| | | | | |
|---------------|------------------|------------------|----------------------|--------------|
| Model No. | DX17 | DX17U | Chuck size | 13mm |
| Power | 750W | 750W | Max cutting capacity | wood 30mm |
| Voltage | 220-240V~50/60Hz | 110-127V~50/60Hz | | steel 13mm |
| No load speed | | 0-3000/min | | masonry 16mm |
| Impact rate | | 0-48000bpm | Machine weight | 1.8Kg |

ACCESSORIES

1pc Auxiliary handle
1pc Chuck key
1pc Depth gauge
Color box



DX16 850W 13mm Impact Drill



FEATURE

- Lock-on switch
- Forward and reverse rotation
- Variable speed switch
- Rubber over mould grip
- Metal depth gauge
- Aluminium gear box
- Metal keyless chuck

SPECIFICATIONS

| | | | | |
|---------------|---------------|--------------------|----------------------|--------------|
| Model No. | DX16 | DX161U | Impact rate | 0-48000bpm |
| Power | 850W | 850W | Max cutting capacity | wood 35mm |
| Voltage | 230-240V~50Hz | 120V~60Hz | | steel 13mm |
| Chuck size | | 13mm metal keyless | | masonry 20mm |
| No load speed | | 0-3000/min | Machine weight | 2.45Kg |

ACCESSORIES

1pc Auxiliary handle
1pc Metal depth gauge
Color box



DX3091 720W 125mm Angle Grinder (Basic model)



FEATURE

- Slim handle design ensures a secure grip at all times
- Slide on-off switch
- Spindle lock
- Accidental restart protection
- External carbon brush change

SPECIFICATIONS

| | | | | |
|-----------|------------------|------------------|---------------|-----------|
| Model No. | DX3091 | DX3091U | No-load speed | 12000/min |
| Power | 720W | 720W | Disc size | 125mm |
| Voltage | 220-240V~50/60Hz | 110-127V~50/60Hz | Disc bore | 22.2mm |

ACCESSORIES

1pc Auxiliary handle
1pc Wheel guard for grinding
1pc Spanner
Color box
* 100/115mm Available



DX3090 720W 125mm Angle Grinder (Deluxe Mode)



FEATURE

- Slim handle design ensures a secure grip at all times
- Slide on-off switch
- Spindle lock
- Accidental restart protection
- 2in1 normal change guard
- External carbon brush change

SPECIFICATIONS

| | | | | |
|-----------|------------------|------------------|---------------|-----------|
| Model No. | DX3090 | DX3090U | No-load speed | 12000/min |
| Power | 720W | 720W | Disc size | 125mm |
| Voltage | 220-240V~50/60Hz | 110-127V~50/60Hz | Disc bore | 22.2mm |

ACCESSORIES

1pc Auxiliary handle 1pair Extra carbon brush
1pc 2in1 guard 1pc Spanner
Color box
* 100/115mm Available



DX372

750W 100mm Angle Grinder (Basic model)



FEATURE

- Slide on/off switch
- Spindle lock
- Slim body design
- Auto stop brush
- Detachable grating prevents damage from debris
- Improved ventilation system to quick cool motor working temperature

SPECIFICATIONS

| | | | | |
|---------------|------------------|------------------|----------------|-------|
| Model No. | DX372 | DX372U | Spindle thread | M10 |
| Power | 750W | 750W | Disc size | 100mm |
| Voltage | 220-240V~50/60Hz | 110-127V~50/60Hz | Disc bore | 16mm |
| No load speed | 12000/min | | Machine weight | 1.5Kg |



ACCESSORIES

1pc Wheel guard for grinding
1pc Auxiliary handle
1pc Spanner
Color box



DX371

750W 115mm Angle Grinder (Basic model)



FEATURE

- Slim body design
- Slide on/off switch
- Spindle lock
- Auto stop brush
- Detachable grating prevents damage from debris
- Improved ventilation system to quick cool motor working temperature

SPECIFICATIONS

| | | | | |
|---------------|------------------|------------------|----------------|--------|
| Model No. | DX371 | DX371U | Spindle thread | M14 |
| Power | 750W | 750W | Disc size | 115mm |
| Voltage | 220-240V~50/60Hz | 110-127V~50/60Hz | Disc bore | 22.2mm |
| No load speed | 12000/min | | Machine weight | 1.5Kg |



ACCESSORIES

1pc Wheel guard for grinding
1pc Auxiliary handle
1pc Spanner
Color box

DX37.1

750W 115mm Angle Grinder (Deluxe Mode)



FEATURE

- Slide on/off switch with accidental start protection*
- Anti-vibration auxiliary handle*
- Quick guard adjustment
- Detachable grating prevents damage from debris
- Spanner storage on auxiliary handle
- Improved ventilation system to quick cool motor working temperature
- Spindle lock
- Slim body design

SPECIFICATIONS

| | | | | |
|---------------|------------------|------------------|----------------|--------|
| Model No. | DX37.1 | DX37U | Spindle thread | M14 |
| Power | 750W | 750W | Disc size | 115mm |
| Voltage | 220-240V~50/60Hz | 110-127V~50/60Hz | Disc bore | 22.2mm |
| No load speed | 12000/min | | Machine weight | 1.5Kg |



ACCESSORIES

1pc 2in1 guard
1pc Anti-vibration auxiliary handle*
1pc Spanner
Color box

DX371.2

750W 125mm Angle Grinder (Basic model)



FEATURE

- Slim body design
- Slide on/off switch
- Spindle lock
- Auto stop brush
- Detachable grating prevents damage from debris
- Improved ventilation system to quick cool motor working temperature

SPECIFICATIONS

| | | | | |
|---------------|------------------|------------------|----------------|--------|
| Model No. | DX371.2 | DX371.2U | Spindle thread | M14 |
| Power | 750W | 750W | Disc size | 125mm |
| Voltage | 220-240V~50/60Hz | 110-127V~50/60Hz | Disc bore | 22.2mm |
| No load speed | 12000/min | | Machine weight | 1.5Kg |



ACCESSORIES

1pc Wheel guard for grinding
1pc Auxiliary handle
1pc Spanner
Color box

DX373.1

750W 125mm Angle Grinder (Deluxe Mode)



FEATURE

- Slide on/off switch with accidental start protection*
- Anti-vibration auxiliary handle*
- Quick guard adjustment
- Slim body design
- Detachable grating prevents damage from debris
- Improved ventilation system to quick cool motor working temperature
- Spindle lock

SPECIFICATIONS

| | | | | |
|---------------|------------------|------------------|----------------|--------|
| Model No. | DX373.1 | DX373U | Spindle thread | M14 |
| Power | 750W | 750W | Disc size | 125mm |
| Voltage | 220-240V~50/60Hz | 110-127V~50/60Hz | Disc bore | 22.2mm |
| No load speed | 12000/min | | Machine weight | 1.5Kg |



ACCESSORIES

1pc 2in1 quick guard
1pc Anti-vibration auxiliary handle*
1pc Spanner
Color box

DX331

900W 125mm Angle Grinder (Basic model)



- FEATURE
- Spindle lock
 - Auto stop brush
 - Slim body design
 - Slide on/off switch
 - Improved ventilation system for quickly cooling down temperture
 - 2-position auxiliary handle
 - Tool-free adjustable guard

SPECIFICATIONS

| | | | | |
|---------------|------------------|------------------|----------------|--------|
| Model No. | DX331 | DX331U | Spindle thread | M14 |
| Power | 900W | 900W | Disc size | 125mm |
| Voltage | 220-240V~50/60Hz | 110-127V~50/60Hz | Disc bore | 22.2mm |
| No load speed | | 12000/min | Machine weight | 1.8Kg |



- ACCESSORIES
- 1pc Quick change guard for grinding
 - 1pc Auxiliary handle
 - 1pc Wrench
 - Color box
 - * 100mm Available

DX33

900W 125mm Angle Grinder (Deluxe Mode)



- FEATURE
- Spindle lock
 - With accidental start protection*
 - Slim body design
 - Spanner storage on auxiliary handle
 - Slide on/off switch
 - Improved ventilation system for quickly cooling down temperture
 - 2-position auxiliary handle
 - Tool-free adjustable guard

SPECIFICATIONS

| | | | | |
|---------------|------------------|------------------|----------------|--------|
| Model No. | DX33 | DX33U | Spindle thread | M14 |
| Power | 900W | 900W | Disc size | 125mm |
| Voltage | 220-240V~50/60Hz | 110-127V~50/60Hz | Disc bore | 22.2mm |
| No load speed | | 12000/min | Machine weight | 1.8Kg |



- ACCESSORIES
- 1pc 2in1 guard
 - 1pc Anti-vibration auxiliary handle*
 - 1pc Spanner
 - Color box



DX36

1200W 125mm Angle Grinder



- FEATURE
- Quick guard adjustment
 - Spindle lock
 - Anti-vibration auxiliary handle
 - Spanner storage on auxiliary handle
 - Ball joint cord connection for full protection of power cord

SPECIFICATIONS

| | | | | |
|---------------|------------------|------------------|----------------|--------|
| Model No. | DX36 | DX36U | Spindle thread | M14 |
| Power | 1200W | 1200W | Disc size | 125mm |
| Voltage | 220-240V~50/60Hz | 110-127V~50/60Hz | Disc bore | 22.2mm |
| No load speed | | 10000/min | Machine weight | 2.59Kg |



- ACCESSORIES
- 1pc Wheel guard for cutting
 - 1pc Wheel guard for grinding
 - 1pc Anti-vibration auxiliary handle
 - 1pc Spanner
 - Color box
 - * DX361U for 125mm angle grinder with constant speed.

DX3061

1200W 125mm Angle Grinder (Basic model)



- FEATURE
- Quick guard adjustment
 - Slide on/off switch
 - Soft start
 - Auto stop brush
 - Slim handle design ensures a secure grip at all times

SPECIFICATIONS

| | | | | |
|---------------|------------------|------------------|----------------|--------|
| Model No. | DX3061 | DX3061U | Spindle thread | M14 |
| Power | 1200W | 1200W | Disc size | 125mm |
| Voltage | 220-240V~50/60Hz | 110-127V~50/60Hz | Disc bore | 22.2mm |
| No load speed | | 12000/min | | |



- ACCESSORIES
- 1pc Auxiliary handle
 - 1pc Spanner
 - 1pc Quick change guard for grinding
 - Color box
 - * 100/115mm Available

DX3060

1200W 125mm Angle Grinder (Deluxe Mode)



- FEATURE
- Quick guard adjustment
 - Slide on/off switch
 - Soft start
 - Auto stop brush
 - Restart protection
 - Slim handle design ensures a secure grip at all times
 - Spanner storage on auxiliary handle
 - Anti-vibration auxiliary handle

SPECIFICATIONS

| | | | | |
|---------------|------------------|------------------|----------------|--------|
| Model No. | DX3060 | DX3060U | Spindle thread | M14 |
| Power | 1200W | 1200W | Disc size | 125mm |
| Voltage | 220-240V~50/60Hz | 110-127V~50/60Hz | Disc bore | 22.2mm |
| No load speed | | 12000/min | | |



- ACCESSORIES
- 1pc Anti-vibration auxiliary handle
 - 1pc 2 in 1 quick guard
 - 1pc Spanner
 - Color box
 - * 100/115mm Available

DX3066

1400W 125mm Angle Grinder (Basic model)



FEATURE

- Slim handle design ensures a secure grip at all times
 - Quick guard adjustment
 - Slide on/off switch
 - Overload protection
 - Auto stop brush
 - Variable speed 2800-12000/min.6 stages
- Soft start

SPECIFICATIONS

| | | |
|---------------|------------------|------------------|
| Model No. | DX3066 | DX3066U |
| Power | 1400W | 1400W |
| Voltage | 220-240V~50/60Hz | 110-127V~50/60Hz |
| No load speed | 2800-12000 /min | |

| | |
|----------------|--------|
| Spindle thread | M14 |
| Disc size | 125mm |
| Disc bore | 22.2mm |

ACCESSORIES

1pc Auxiliary handle
1pc Spanner
1pc Quick change guard for grinding
Color box
* 100/115mm Available



DX3065

1400W 125mm Angle Grinder (Deluxe Mode)



FEATURE

- Slim handle design ensures a secure grip at all times
 - Quick guard adjustment
 - Overload protection
 - Auto stop brush
 - Anti-vibration auxiliary handle
 - Variable speed 2800-12000/min.6 stages
- Slide on/off switch
 - Soft start
 - Accidental start protection
 - Spanner storage on auxiliary handle

SPECIFICATIONS

| | | |
|---------------|------------------|------------------|
| Model No. | DX3065 | DX3065U |
| Power | 1400W | 1400W |
| Voltage | 220-240V~50/60Hz | 110-127V~50/60Hz |
| No load speed | 2800-12000 /min | |

| | |
|----------------|--------|
| Spindle thread | M14 |
| Disc size | 125mm |
| Disc bore | 22.2mm |

ACCESSORIES

1pc 2 in 1 quick guard
1pc Spanner
1pc Anti-vibration auxiliary handle
Color box
* 100/115mm Available



DX352

2350W 180mm Angle Grinder



FEATURE

- Lock-off switch
 - Quick guard adjustment
 - Rubber over mould grip
 - External carbon brush change
 - Ball joint cord connection for full protection of power cord
- Soft grip rear handle
 - Anti-vibration auxiliary handle
 - Rotating rear handle
 - Spindle lock

SPECIFICATIONS

| | | |
|---------------|------------------|------------------|
| Model No. | DX352 | DX352U |
| Power | 2350W | 2350W |
| Voltage | 220-240V~50/60Hz | 110-127V~50/60Hz |
| No load speed | 8500/min | |

| | |
|----------------|--------|
| Spindle thread | M14 |
| Disc size | 180mm |
| Disc bore | 22.2mm |
| Machine weight | 5.7Kg |

ACCESSORIES

1pc Quick change guard for grinding
1pc Spanner
1pc Anti-vibration auxiliary handle
Color box



DX351

2350W 230mm Angle Grinder (Basic model)



FEATURE

- Lock off switch
 - Quick guard adjustment
 - Spindle lock
 - External carbon brush change
 - Ball joint cord connection for full protection of power cord
- Soft grip rear handle
 - Rubber over mould grip
 - Rotating rear handle

SPECIFICATIONS

| | | |
|---------------|------------------|------------------|
| Model No. | DX351 | DX351U |
| Power | 2350W | 2350W |
| Voltage | 220-240V~50/60Hz | 110-127V~50/60Hz |
| No load speed | 6500/min | |

| | |
|----------------|--------|
| Spindle thread | M14 |
| Disc size | 230mm |
| Disc bore | 22.2mm |
| Machine weight | 5.7Kg |

ACCESSORIES

1pc Anti-vibration auxiliary handle
1pc Spanner
1pc Quick change guard for grinding
Color box



DX35

2350W 230mm Angle Grinder (Deluxe Mode)



FEATURE

- Lock off switch
 - Soft start
 - Spindle lock
 - Rotating rear handle
 - Side on-off switch with accidental start protection
 - Ball joint cord connection for full protection of power cord
- Quick guard adjustment
 - Anti-vibration auxiliary handle
 - Rubber over mould grip
 - Soft grip rear handle
 - External carbon brush change

SPECIFICATIONS

| | | |
|---------------|---------------|------------------|
| Model No. | DX35.1 | DX35U.1 |
| Power | 2350W | 2350W |
| Voltage | 230-240V~50Hz | 110-127V~50/60Hz |
| No load speed | 6500/min | |

| | |
|----------------|--------|
| Spindle thread | M14 |
| Disc size | 230mm |
| Disc bore | 22.2mm |
| Machine weight | 5.7Kg |

ACCESSORIES

1pc 2in1 guard
1pc Wrench
1pc Anti-vibration auxiliary handle
Color box



DX5180

2400W 355mm Cut Off Saw



FEATURE

- Quick release material clamping system
- Whole blade guard
- External brush change
- Light weight stamped steel base
- Spindle lock
- 2400W high performance powerful motor

SPECIFICATIONS

| | | |
|---------------|------------------|------------------|
| Model No. | DX5180 | DX5180U |
| Power | 2400W | 2400W |
| Voltage | 220-240V~50/60Hz | 110-127V~50/60Hz |
| No load speed | 4000/min | |
| Blade size | 355mm | |

| | |
|---|-------------------|
| Disc bore size | 25.4mm |
| Max cutting capacity | Round steel 100mm |
| Square steel 0°:100*100mm;45°:95*95mm | |
| Angle steel 0°:125*125mm;45°:80*80mm | |
| Rectangle steel 0°:80*190mm;45°:90*95mm | |

ACCESSORIES

1pc Cutting disc
1pc Spanner
Color box



DX55

1400W 110mm Tile Cutter



FEATURE

- 1400W High power motor
- Cutting depth adjustable
- External carbon brush change
- 0-45°Angle adjustment
- Lock-on switch

SPECIFICATIONS

| | | |
|---------------|------------------|------------------|
| Model No. | DX55 | DX55U |
| Power | 1400W | 1400W |
| Voltage | 220-240V~50/60Hz | 110-127V~50/60Hz |
| Disc size | 110mm | |
| No load speed | 13800/min | |

| | |
|-------------------|------------|
| Disc bore | 20mm |
| Max cutting depth | 45° 19.5mm |
| | 90° 33.0mm |
| Machine weight | 2.9Kg |



ACCESSORIES

1pc Spanner 1pc Rubber tap connector
1pc Socket wrench
1pc Plastic nozzle
1pc Water hose(2m)
1pc Screw
Color box

DX5280

1400W 185mm Circular Saw



FEATURE

- Spindle lock
- Dust extraction system
- Rubber overmould grip
- Aluminum upper and lower guards
- Steel base
- External carbon brush
- Lock-off switch

SPECIFICATIONS

| | | |
|---------------|------------------|------------------|
| Model No. | DX5280 | DX5280U |
| Power | 1400W | 1400W |
| Voltage | 220-240V~50/60Hz | 110-127V~50/60Hz |
| No load speed | 6000/min | |

| | |
|----------------------|----------|
| Blade size | 185mm |
| Bevel capacity | 0-45° |
| Max cutting capacity | 45° 48mm |
| | 90° 64mm |



ACCESSORIES

1pc Parallel guide 1pc Hex key
1pc Blade 185mm 24T
1pc Dust vacuum tube
1pc Dust vacuum adaptor
Color box

DX56

1800W 185mm Circular Saw



FEATURE

- Spindle lock
- Magnesium base plate & guard
- Built in rafter hook for easy storage
- Rubber over mold grip design on handle
- Bevel track
- Ball joint cord connection for full protection of power cord
- Lock-off switch
- LED light
- Dust blower
- Electric brake
- Rafter hook

SPECIFICATIONS

| | | |
|---------------|---------------|-----------|
| Model No. | DX56 | DX56U |
| Power | 1800W | 1800W |
| Voltage | 230-240V~50Hz | 120V~60Hz |
| No load speed | 6000/min | |

| | |
|----------------------|----------|
| Blade size | 185mm |
| Bevel capacity | 0-56° |
| Max cutting capacity | 45° 45mm |
| | 90° 65mm |



ACCESSORIES

1pc Parallel guide
1pc Hex key
1pc Blade 185mm 24T
1pc Rafter hook
1pc Vacuum adapter
Color box

DX5310

550W 18mm Jig Saw



FEATURE

- Variable speed
- Adjustable base for angle cutting
- 4 position pendulum function
- LED light
- Tool-less blade change system
- Steel base
- Rubber overmould grip

SPECIFICATIONS

| | | |
|---------------|------------------|------------------|
| Model No. | DX5310 | DX5310U |
| Power | 550W | 550W |
| Voltage | 220-240V~50/60Hz | 110-127V~50/60Hz |
| No load speed | 0-3000/min | |
| Stoke length | 18mm | |

| | |
|----------------------|---------------|
| Bevel capacity | ±45° |
| Max cutting capacity | Wood 65mm |
| | Steel 6mm |
| | Aluminum 65mm |
| Pendulum function | 4 stages |



ACCESSORIES

1pc Dust vacuum tube
1pc Dust vacuum adaptor
1pc Hex key
Color box

DX54

750W 20mm Jig Saw



FEATURE

- 4 Position pendulum function
- Aluminum base plate
- Variable speed
- Rubber over mould grip
- LED light
- Lock on switch
- Tool-less blade change system
- Dust blower function

SPECIFICATIONS

| | | |
|---------------|------------------|------------------|
| Model No. | DX54 | DX54U |
| Power | 750W | 750W |
| Voltage | 220-240V~50/60Hz | 110-127V~50/60Hz |
| No load speed | 800-3000/min | |
| Stoke length | 20mm | |

| | |
|----------------------|---------------|
| Bevel capacity | ±45° |
| Max cutting capacity | Wood 80mm |
| | Steel 10mm |
| | Aluminum 20mm |
| Machine weight | 2.3Kg |




ACCESSORIES

1pc Vacuum adapter
1pc Plastic foot plate protection
1pc Parallel guide
1pc Wood cutting blade
1pc Metal cutting blade
Color box

DX5110

780W 26mm Jig Saw



FEATURE

- Aluminum gear box
- 4 Position pendulum function
- Bevel Capacity 0-45° Left and Right
- Tool-less base bevel adjustment
- Tool-less blade change system
- Ball Joint Cord Connection For Full Protection Of Power Cord

SPECIFICATIONS

| | | |
|---------------|---------------|------------------|
| Model No. | DX5110 | DX5110U |
| Power | 780W | 780W |
| Voltage | 220-240V~50Hz | 120-127V~50/60Hz |
| No load speed | 800-3100/min | |
| Stoke length | 26mm | |

| | |
|----------------------|---------------|
| Bevel capacity | 0-45° |
| Max cutting capacity | Wood 100mm |
| | Steel 10mm |
| | Aluminum 25mm |
| Machine weight | 3.1Kg |



ACCESSORIES

1pc Vacuum adapter
1pc Parallel guide
1pc Wood cutting blade
Color box

DX5320

850W 28mm Reciprocating Saw



FEATURE

- Tool-Less blade change system
- Adjustable pivot foot plate
- Rubber overmould grip
- Variable speed
- Aluminum gear box

SPECIFICATIONS

| | | | |
|---------------|------------------|----------------------|------------|
| Power | 850W | Stoke length | 28mm |
| Voltage | 220-230V~50/60Hz | Max cutting capacity | Wood 115mm |
| No load speed | 0-2800/min | | Steel 10mm |



ACCESSORIES

1pc Blade for wood 230mm
Color box

DX5120

1200W 30mm Reciprocating Saw



FEATURE

- Aluminium gear box
- Variable speed
- LED light
- Lock on switch
- Rubber over mould grip
- Tool-Less pivot foot plate adjustment
- Tool-Less blade change system
- Pendulum function
- Built in rafter hook for easy storage
- Roller ball joint cord connection cord

SPECIFICATIONS

| | | | | |
|---------------|------------------|------------|----------------------|---------------|
| Model No. | DX5120 | DX5120U | Max cutting capacity | Wood 300mm |
| Power | 1200W | 1200W | | Steel 12mm |
| Voltage | 220-240V~50/60Hz | 120V~60Hz | | Plastic 150mm |
| No load speed | | 0-2800/min | Machine weight | 3.7Kg |
| Stoke length | | 30mm | | |



ACCESSORIES

1pc Blade for wood
1pc Rafter hook
Color box

DX89

2100W Router



FEATURE

- Soft start
- Spindle lock
- Soft grip handle
- 8 Position preset plunge depth stop
- Dust extraction port
- Lock off switch
- Micro depth adjustment
- Constant speed control
- Aluminium base
- Ergonomic design
- Variable speed

SPECIFICATIONS

| | | | | |
|------------------|------------------|------------------|----------------|-----------------------|
| Model No. | DX89 | DX89U | Collet size | 1/2" & 3/8" & 1/4" |
| Power | 2100W | 2100W | | (6mm&8mm&12mm for EU) |
| Voltage | 220-230V~50/60Hz | 120-127V~50/60Hz | Machine weight | 4.3Kg |
| No load speed | | 11500-28000/min | | |
| Max plunge depth | | 60mm | | |



ACCESSORIES

1pc Center pin
1pc Parallel guide
2pc Guide bushes
3pc Collets
Color box
1pc Spanner
1pc Dust extraction tube
1pc Router mat



DX49.1

350W SDS Oscillation tool



FEATURE

- Slide on/off switch
- LED light
- Rubber over mould grip
- Multi function: sawing,scraping,sanding etc
- Variable speed control
- Universal interface fit for all brand oscillating blade
- Tool-free accessory change system
- Variable speed provides great control on various materials
- Aluminium gear box for durability and prolonged life

SPECIFICATIONS

| | | | | |
|---------------|---------------|-----------------|--------------------|-------|
| Model No. | DX49.1 | DX49U | Oscillations Angle | 3.2° |
| Power | 350W | 350W | Machine weight | 1.6Kg |
| Voltage | 230-240V~50Hz | 120V~60Hz | | |
| No load speed | | 11000-20000/min | | |

* DX49 for 350W SDS oscillation tool with color box only.



ACCESSORIES

1pc Rigid scraping blade
9pc Sanding sheet
1pc HSS segment saw blade
1pc Sanding base
1pc Metal cutting blade
1pc Precise wood cutting blade
Injection Plastic Box + Color box
2pc Plastic box

DX86

900W 3mm Planer



FEATURE

- Left or right side dust and chip extraction
- Aluminium base with V-groove
- Soft grip handle
- Micro Cutting depth adjustment
- Dust extraction port

SPECIFICATIONS

| | | | | |
|---------------|---------------|------------------|-------------------|-------|
| Model No. | DX86 | DX86U | Max cutting depth | 3mm |
| Power | 900W | 900W | Max rebate depth | 16mm |
| Voltage | 220-240V~50Hz | 110-127V~50/60Hz | Max cutting width | 82mm |
| No load speed | | 16000/min | Machine weight | 2.8Kg |



ACCESSORIES

1pc Parallel guide
2pc Blades on machine
1pc Spanner
1pc Rebate guide
1pc Dust bag
Color box



DX46

400W 125mm Rotary Sander

FEATURE

- Patented Cyclone dust collection box
- Dust extraction system
- Dust sealed switch
- Hook and loop system
- Variable speed control
- Ball joint cord connection for full protection of power cord

- With brake function
- Rubber over mould grip

SPECIFICATIONS

| | | |
|---------------|----------------|------------------|
| Model No. | DX46 | DX46U |
| Power | 400W | 400W |
| Voltage | 230-240V~50Hz | 110-127V~50/60Hz |
| No load speed | 5000-14000/min | 5000-12000/min |

| | |
|------------------|-------|
| Base diameter | 125mm |
| Orbital diameter | 2.5mm |
| Machine weight | 1.6Kg |

ACCESSORIES

1pc Cyclone box

1pc Velcro sanding paper

1pc Vacuum adapter

Color box

DX48

950W Belt Sander

FEATURE

- Belt centering system adjustment
- Dust Collection System
- Rubber over mould grip
- Variable speed control
- Lock on switch
- Quick release belt change

SPECIFICATIONS

| | | |
|---------------|---------------|-------------|
| Model No. | DX48 | DX48U |
| Power | 950W | 950W |
| Voltage | 230-240V~50Hz | 120V~60Hz |
| No load speed | | 240-350/min |

| | |
|----------------|----------|
| Belt size | 76x533mm |
| Grinding size | 76x130mm |
| Machine weight | 3.1Kg |

ACCESSORIES

1pc Dust bag

1pc Sanding belt

1pc Vacuum adapter

Color box

DX461

400W 125mm Rotary Sander

FEATURE

- With brake function
- Variable speed control
- Dust sealed switch
- Hook and loop system
- Ball joint cord connection for full protection of power cord
- Patented Cyclone dust collection box

- Dust extraction system
- Rubber over mould grip

SPECIFICATIONS

| | | |
|---------------|---------------|------------------|
| Model No. | DX461 | DX461U |
| Power | 400W | 400W |
| Voltage | 230-240V~50Hz | 110-127V~50/60Hz |
| No load speed | | 5000-14000/min |

| | |
|------------------|-------|
| Base diameter | 125mm |
| Orbital diameter | 2.5mm |
| Machine weight | 1.6Kg |

ACCESSORIES

1pc Dust bag

1pc Velcro sanding paper

1pc Vacuum adapter


Color box

56

57



DX47 240W 1/4 Sheet Palm Sander



FEATURE

- Patented Cyclone dust collection box
- Hook and loop & Quick clamp system
- Dust sealed switch
- Dust extraction system
- Ball joint cord connection for full protection of power cord

SPECIFICATIONS

| | | | | |
|---------------|---------------|------------------|------------------|-----------|
| Model No. | DX47 | DX47U | Base size | 103x110mm |
| Power | 240W | 240W | Orbital diameter | 1.6mm |
| Voltage | 230-240V~50Hz | 110-127V~50/60Hz | Machine weight | 1.28Kg |
| No load speed | 15000/min | | | |



ACCESSORIES

1pc Cyclone box
1pc Sanding paper
1pc Paper punch
1pc Vacuum adapter
Color box

DX471 240W 1/4 Sheet Palm Sander



FEATURE

- Hook and loop & Quick clamp system
- Dust collection system
- Dust sealed switch
- Dust extraction system
- Ball joint cord connection for full protection of power cord

SPECIFICATIONS

| | | | | |
|---------------|---------------|------------------|------------------|-----------|
| Model No. | DX471 | DX471U | Base size | 103x110mm |
| Power | 240W | 240W | Orbital diameter | 1.6mm |
| Voltage | 230-240V~50Hz | 110-127V~50/60Hz | Machine weight | 1.28Kg |
| No load speed | 15000/min | | | |



ACCESSORIES

1pc Dust bag
1pc Sanding paper
1pc Paper punch
1pc Vacuum adapter
Color box

DX45 240W 1/3 Sheet Sander



FEATURE

- Patented Cyclone dust collection box
- Hook and loop & Quick clamp system
- Aluminium base
- Variable speed control
- Slide on/off switch

SPECIFICATIONS

| | | | | |
|---------------|----------------|------------------|------------------|----------|
| Model No. | DX45 | DX45U | Base size | 90x187mm |
| Power | 240W | 240W | Orbital diameter | 1.6mm |
| Voltage | 230-240V~50Hz | 110-127V~50/60Hz | Machine weight | 1.63Kg |
| No load speed | 6000-11000/min | 6000-12000/min | | |



ACCESSORIES

1pc Cyclone box
1pc Sanding paper
1pc Paper punch
1pc Vacuum adapter
Color box

DX44 350W 1/2 Sheet Sander



FEATURE

- Patented Cyclone dust collection box
- Hook and loop & Quick clamp system
- Aluminium base
- Slide on/off switch
- Variable speed control

SPECIFICATIONS


| | | | | |
|---------------|----------------|------------------|------------------|-----------|
| Model No. | DX44 | DX44U | Base size | 113x230mm |
| Power | 350W | 350W | Orbital diameter | 2.4mm |
| Voltage | 230-240V~50Hz | 110-127V~50/60Hz | Machine weight | 2.15Kg |
| No load speed | 6000-11000/min | | | |



ACCESSORIES

1pc Cyclone box
1pc 80 Grit sanding paper
1pc Paper punch
1pc Vacuum adapter
Color box

DX3030 1450W 180mm Car Polisher



FEATURE

- Constant speed control
- Rubber over mould grip
- Spindle lock
- Lock on switch
- External brush change
- Ball Joint Cord Connection For Full Protection Of Power Cord

SPECIFICATIONS

| | | | | |
|---------------|------------------|------------------|----------------|--------|
| Model No. | DX3030 | DX3030U | Disc size | 180mm |
| Power | 1450W | 1450W | Spindle thread | M14 |
| Voltage | 220-240V~50/60Hz | 120-127V~50/60Hz | Machine weight | 3.27Kg |
| No load speed | 1000-3100/min | | | |



ACCESSORIES

1pc Auxiliary handle
1pc Polishing pad
3pc Sanding papers
1pc Velcro pad
1pc Waxing pad
Color box

DX87 2000W Heat Gun



FEATURE

- D-handle
- Rubber over mould grip
- LED light
- 2 Positon airflow
- Stepless temperature adjustment
- Built-in work support stand
- LCD display

SPECIFICATIONS

| | | |
|------------|---------------|------------------|
| Model No. | DX87 | DX87U |
| Power | 2000W | 2000W |
| Voltage | 230-240V~50Hz | 110-127V~50/60Hz |
| Temp range | | 50-600°C |

| | |
|----------------|-------------|
| Air flow rate | I 300L/min |
| | II 500L/min |
| Machine weight | 0.91Kg |

ACCESSORIES

1pc Scraper 1pc Flat nozzle
1pc Glass protection nozzle
1pc Concentration nozzle
1pc Hook nozzle
Color box



DX9050 2400W 40L Air Compressor



FEATURE

- Powerful and high speed motor contribute excellent air productivity
- Equipped with a pressure gauge to monitor the pressure in the receiver and outlet
- High qualily mechanism is resistant to high and prolonged loads,also a long service life
- With drain valve & safty valve & air intake filter
- Ultra low working noise allows the device to be used directly on the job site without any noticeable discomfort
- Tubeless wheels and handy handle allows the compressor to be moved around the workplace with minimal time and effort

SPECIFICATIONS

| | |
|---------------|----------|
| Power | 2400W |
| No load speed | 2800/min |
| Tank capacity | 40L |
| Productivity | 200L/min |

| | |
|------------------|--------|
| Working pressure | 0.7MPa |
| Noise level | 75 dB |
| Machine weight | 37Kg |

ACCESSORIES

2pc Rear wheel 1pc Handle
4pc Air filters 1pc 1set bolts and nuts
1pc Cushion 4pc Fam cover
Color box



DH1002 94cm Jawhors



FEATURE

- Clamping range reaches 940mm
- Large clamping force exceeds 1,000kg
- All steel construction provides rigidity and strength
- Urethane pads protect the loaded object
- Tripod base for stability on uneven ground
- Quickly folds down for storage
- Quick release leg latches
- Transport wheels

SPECIFICATIONS

| | |
|---------------------|-----------|
| Clamping range | 0-940mm |
| Max. clamping force | 1,000kg |
| Clamp method | Foot step |
| Max. load | 272kg |

| | |
|---------------------------|----------------|
| Folded size | 737x356x330mm |
| Clamp travel - foot pedal | 9.5mm per step |
| Construction | Solid steel |
| Machine weight | 42.9Kg |

ACCESSORIES

Color box



DH1004 Clamping Sawhorse



FEATURE

- Integrated clamping system securely holds the working material in place
- External cable hooks and Folding tray for convenient storage of tools
- Compact and lightweight design for effortless transport and storage
- 455Kg Max holding capacity per pair

SPECIFICATIONS

| | |
|----------------------|-------------------|
| Max. weight capacity | 455kg/pair |
| Product size | 685mmx130mmx830mm |
| Fold size | 485mmx130mmx830mm |
| Weight | 7.2kg |

ACCESSORIES

2pc Quick clamps
Color box



DX9040 1500W 24L Air Compressor



FEATURE

- Even though the compressor weighs 25kg,it is extremely light and easy to transport
- The tubeless wheels and handy handle allows the compressor to be moved around the workplace with minimal time and effort
- Powerful and high speed motor contribute excellent air productivity
- The integrated pressure gauge keeps track of receiver and outlet pressure at all times
- Ultra low working noise allows the device to be used directly on the job site without any noticeable discomfort
- With drain valve & safty valve & air intake filter

SPECIFICATIONS

| | |
|---------------|----------|
| Power | 1500W |
| No load speed | 2800/min |
| Tank capacity | 24L |
| Productivity | 120L/min |

| | |
|------------------|--------|
| Working pressure | 0.7MPa |
| Noise level | 75 dB |
| Machine weight | 25Kg |

ACCESSORIES

2pc Air filters 2pc Rear wheel
1pc Handle 1pc 1set bolts and nuts
1pc Cushion
Color box



DH1005

2 in 1 Folding Worktable and Sawhorse



FEATURE

- Integrated clamping system securely holds the working material in place
- Folding tray for convenient storage of tools
- Clamps dogs increase clamping options further
- Universal quick clamps can be used on all work support products
- Table joiner link locks together multiple units if desired

SPECIFICATIONS

| | | | |
|-------------------|---------------|-------------------|------------------------------------|
| Max. clamp force | 122kg-136kg | Max. load | 136kg as table / 454kg as sawhorse |
| Opened table size | 787x635mm | Opened table size | 787x635mm |
| Folded table size | 635x127x889mm | Folded table size | 635x127x889mm |
| Max. clamp width | 457mm | Weight | 13.5kg |



ACCESSORIES

2pc Quick clamps
4pc Dog clamps
Color box

DH1006

Miter Saw Stand



FEATURE

- Universal design works with all brands of miter saws
- Quick set up with quick-release levers
- Integrated material stops, repetitive cuts can be made quickly and accurately
- Tooling box and metal net on the worktop makes the tools organized
- Two sturdy wheels that make transporting the stand effortless
- Legs provide superior support and fold away for easy storage
- Compact design Lightweight aluminum construction allows for easy transport to and from the jobsite

SPECIFICATIONS

| | |
|----------------------|-----------------------------|
| Max load | 150kg |
| Product size | (1090-1675)x700x(845-955)mm |
| Fold size | 1260x260x195mm |
| Material stops width | 1090-1675mm |



ACCESSORIES

Color box





DG210

18V Brushless 33cm Grass Trimmer

FEATURE


- Intelligent cut for extending the run time depending on working conditions
- Gear transmission for more power and torque output
- Strong brushless motor for 10 times longer life time, higher efficiency, and longer running time
- Adjustable auxiliary handle
- Dual line bump feed system
- Compact and lightweight design
- Foldable shaft for easy storage

SPECIFICATIONS

| | |
|---------------------|----------|
| Rated voltage | 18V |
| Cutting diameter | 33cm |
| No-load speed | 5000/min |
| Line diameter | 2.0mm |
| Cutting line length | 2x2m |
| Machine weight | 3.9kg |

ACCESSORIES

- 1pc Safety guard
- 1pc Auxiliary handle
- 1pc Hex key
- 1pc 4.0Ah Battery pack
- 1pc Charger(4A)

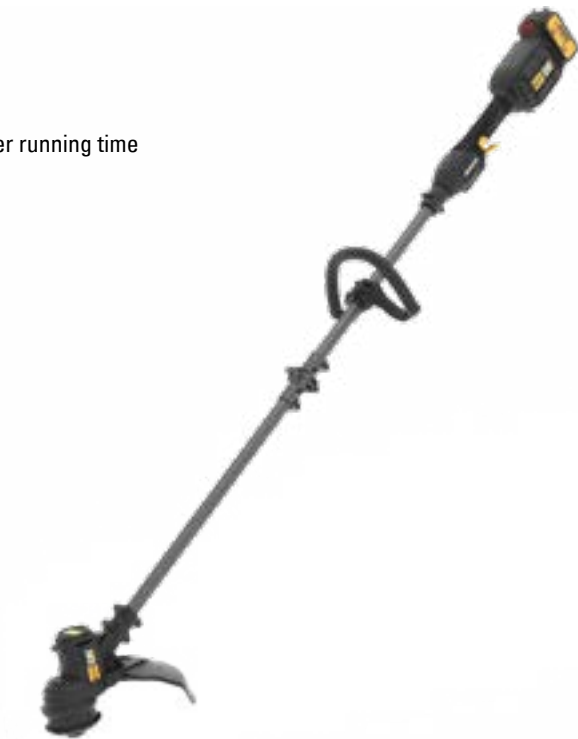

01

Gear transmission for more power and torque output



02

Foldable shaft for easy storage



03

Dual line bump feed system

DG220

18V Brushless 61cm Hedge Trimmer

FEATURE

- STRIKE CUT function to overcome tough jobs when meet jumbled condition
- Large cutting capacity can cut branches up to 1"(25mm) thick
- Strong brushless motor for 10 times longer life time, higher efficiency, and longer running time each full charge
- Dual action cutting blades for reduced vibration and smooth cutting performance
- Dual safety switch for more safety

SPECIFICATIONS

| | |
|-----------------------|----------|
| Rated voltage | 18V |
| No-load speed | 3300/min |
| Blade length | 61cm |
| MAX. Cutting diameter | 25mm |
| Machine weight | 2.8kg |

ACCESSORIES

- 1pc Blade sheath
- 1pc Safety guard
- 1pc 4.0Ah Battery pack
- 1pc Charger(4A)



DG250

18V Brushless Jet Fan Blower

FEATURE

- EVER BALANCE Technology for good balance whenever use 4Ah or 8Ah battery
- Strong brushless motor for 10 times longer life time, higher efficiency, and longer running time
- Variable speed design for optimal performance depending on different working conditions
- Lightweight and ergonomic one-hand operation

SPECIFICATIONS

| | |
|----------------|----------------------|
| Rated voltage | 18V |
| Air speed | 161km/h |
| Air volume | 765m ³ /h |
| Blow force | 10N |
| Machine weight | 2.1kg |

ACCESSORIES

- 1pc 4.0Ah Battery pack
- 1pc Charger(4A)



DG236

18V Brushless 1" Pruner Shears

FEATURE

- High-efficiency brushless motor – for higher power, extended runtime, and longer life
- Slim body and ergonomic design for easy one hand operation
- Titanium Coated SK5 high strength blade with sharp edges provides longer blade life and smooth cutting surface
- 25mm max cutting capacity with a compact design
- Blade can be interlocked with the trigger, providing smooth blade movement similar to that of a hand pruner
- Electronic technology controls blade crossing and blade opening to increase cutting efficiency and run-time
- Double Lock-off switch for security and left-right handed users
- Power Share® battery is interchangeable with other 20V MAX CAT tools

SPECIFICATIONS

| | |
|--------------------|-----------------------|
| Rated voltage | 18V |
| Max blades opening | 25mm |
| Cutting speed | 0.5 second/cut |
| Blade | Titanium plated blade |
| Opening design | Two types |
| LED light | Yes |

ACCESSORIES

- 1pc 2.0Ah Battery pack
- 1pc Charger(2A)



DG230

18V Brushless 30cm Chain Saw

FEATURE

- Heavy load indicator light provides power and runtime feedback during demanding applications
- More compact design for light weight and easy use
- Strong brushless motor for 10 times longer life time, higher efficiency, and longer running time
- Auto chain lubrication with oil level window
- Auto loading technology automatically adjusts power for optimal performance
- Quick stop chain brake and auto kick back protection for added safety
- Tool-free chain tension

SPECIFICATIONS

| | |
|-------------------|--------|
| Rated voltage | 18V |
| Bar length | 30cm |
| Chain speed | 7.9m/s |
| Oil tank capacity | 6.1oz |
| Machine weight | 4.65kg |

ACCESSORIES

- 1pc Chain & bar
- 1pc Blade protection cover
- 1pc 4.0Ah Battery pack
- 1pc Charger(4A)





DG231

18V Brushless Mini Chainsaw

FEATURE

- Brushless motor provides higher power, extended run time, and longer life
- 12cm max cutting capacity
- More compact and light weight design
- Tool-free chain replacement and tension system
- Double lock-off switch for security
- Soft grip for second grip point

SPECIFICATIONS

| | |
|-------------------|-------------------|
| Rated voltage | 18V |
| Bar length | 12cm |
| Chain speed | 10m/s |
| Oil tank capacity | 20ml |
| Chain gauge | 0.043"(1.1mm) m/s |
| Chain pitch | 7.6mm |

ACCESSORIES

- 1pc Blade protection cover
- 1pc Bottle
- 1pc 4.0Ah Battery pack
- 1pc Charger(4A)



DG270

18V Brushless 34cm Lawn Mower

FEATURE

- Brushless motor provides higher power, extended run time, and longer life
- Intellect technology to keep constant cutting efficiency even in dense grass
- 35L Bag collection with filling indicator
- Ergonomically designed handle with soft grip
- Cutting to edge
- Vertical storage for saving space

SPECIFICATIONS

| | |
|---------------------------|----------------------|
| Rated voltage | 18V |
| No load speed | 3000/min |
| Deck width | 34cm |
| Wheel size | 150mm/150mm |
| Bag collection | 35L |
| Cutting height | 20-70mm |
| Cutting height adjustment | 6 Positions, 1 Level |

ACCESSORIES

- 1pc Grass collection bag
- 1pc 4.0Ah Battery pack
- 1pc Charger(4A)



DG272

2X18V Brushless 41cm Lawn Mower

FEATURE

- Intellicut technology to keep constant cutting efficiency even in dense grass
- Brushless motor provides higher power, extended run time, and longer life
- 2-in-1: bag collection and mulch function
- Grass bag filling indicator
- Ergonomically designed handle with soft grip
- Cutting to edge
- Vertical storage for saving space
- One button quick release telescopic handle for compact storage

SPECIFICATIONS

| | |
|---------------------------|-------------|
| Rated voltage | 2X18V |
| No load speed | 3000/min |
| Deck width | 41cm |
| Wheel size | 180mm/200mm |
| Bag collection | 50L |
| Cutting height | 20-70mm |
| Cutting height adjustment | 7 Positions |

ACCESSORIES

- 1pc Grass collection bag
- 1pc 4.0Ah Battery pack
- 1pc Charger(4A)



INTELLICUT
INTELLICUT™ Technology
- for extending the run time
depending on working conditions



INTELLICUT
INTELLICUT™ Technology
- for extending the run time
depending on working conditions



DG274 2X18V Brushless 51cm Self-propelled Lawn Mower

FEATURE

- Intellicut technology to keep constant cutting efficiency even in dense grass
- Brushless motor provides higher power, extended run time, and longer life
- 3 in1 mower: bagging, mulching, side-discharge
- Ergonomically designed handle
- Cutting to edge
- Vertical storage for saving space
- One button quick release telescopic handle for compact storage

SPECIFICATIONS

| | |
|---------------------------|-------------|
| Rated voltage | 2X18V |
| No load speed | 2800/min |
| Deck width | 51cm |
| Wheel size | 200mm/250mm |
| Bag collection | 70L |
| Cutting height | 40-100mm |
| Cutting height adjustment | 7 Positions |
| Bag material | full fabric |
| Deck material | steel |
| Side discharger | Yes |
| Self-propelled | Yes |

ACCESSORIES

- 1pc Grass collection bag
- 1pc Side-discharge deflector
- 2pc 8.0Ah battery
- 1pc 4A dual port charger




Self-propelled




3-in-1: Bagging / Mulching / Side-discharge



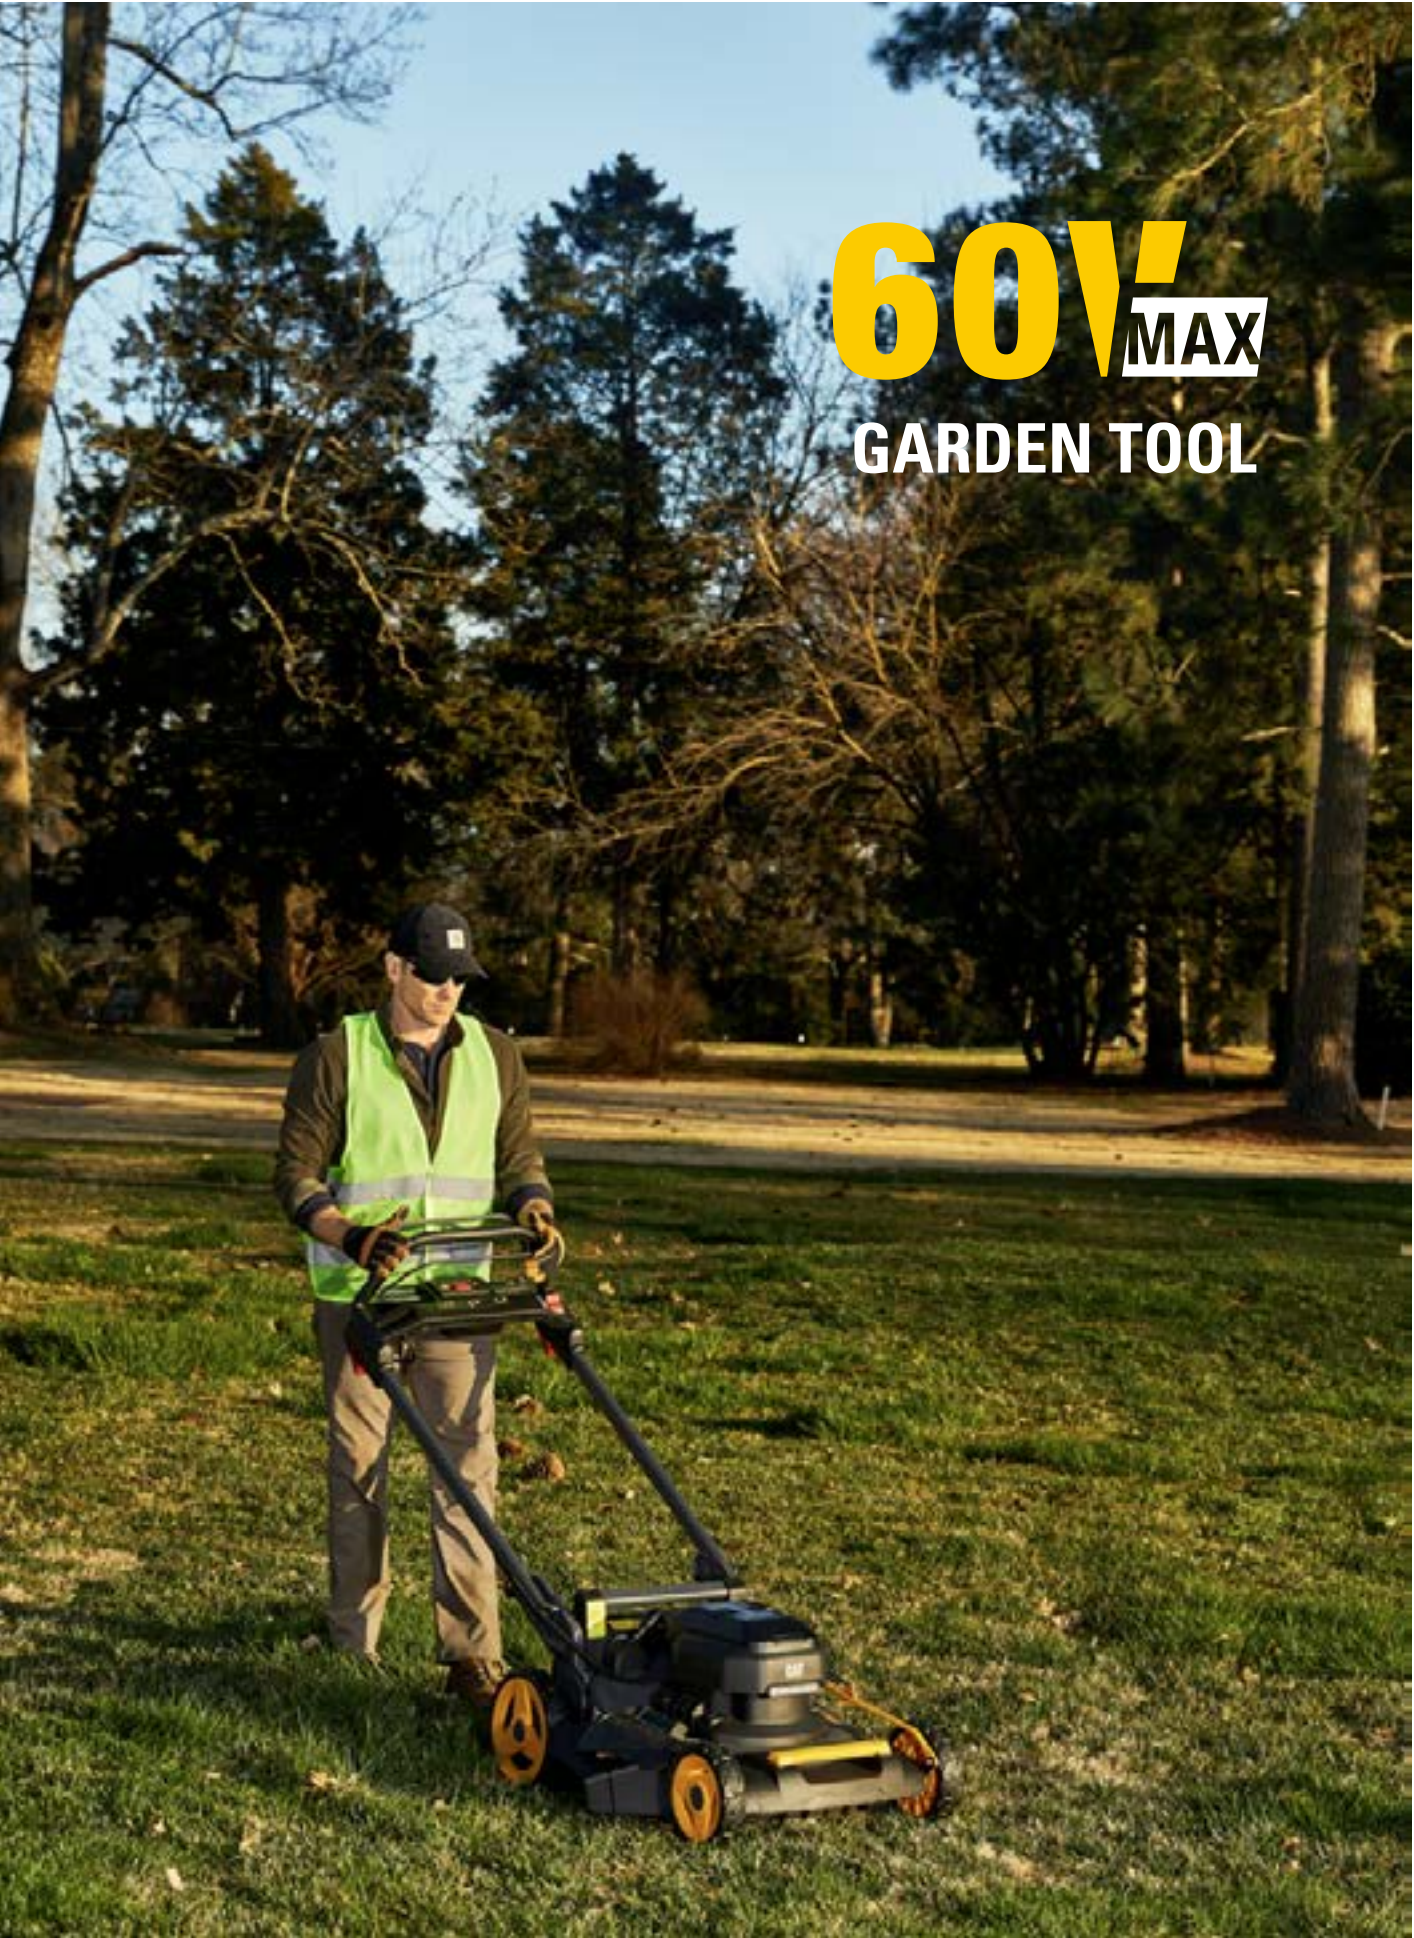

60V^{MAX}
GARDEN TOOL

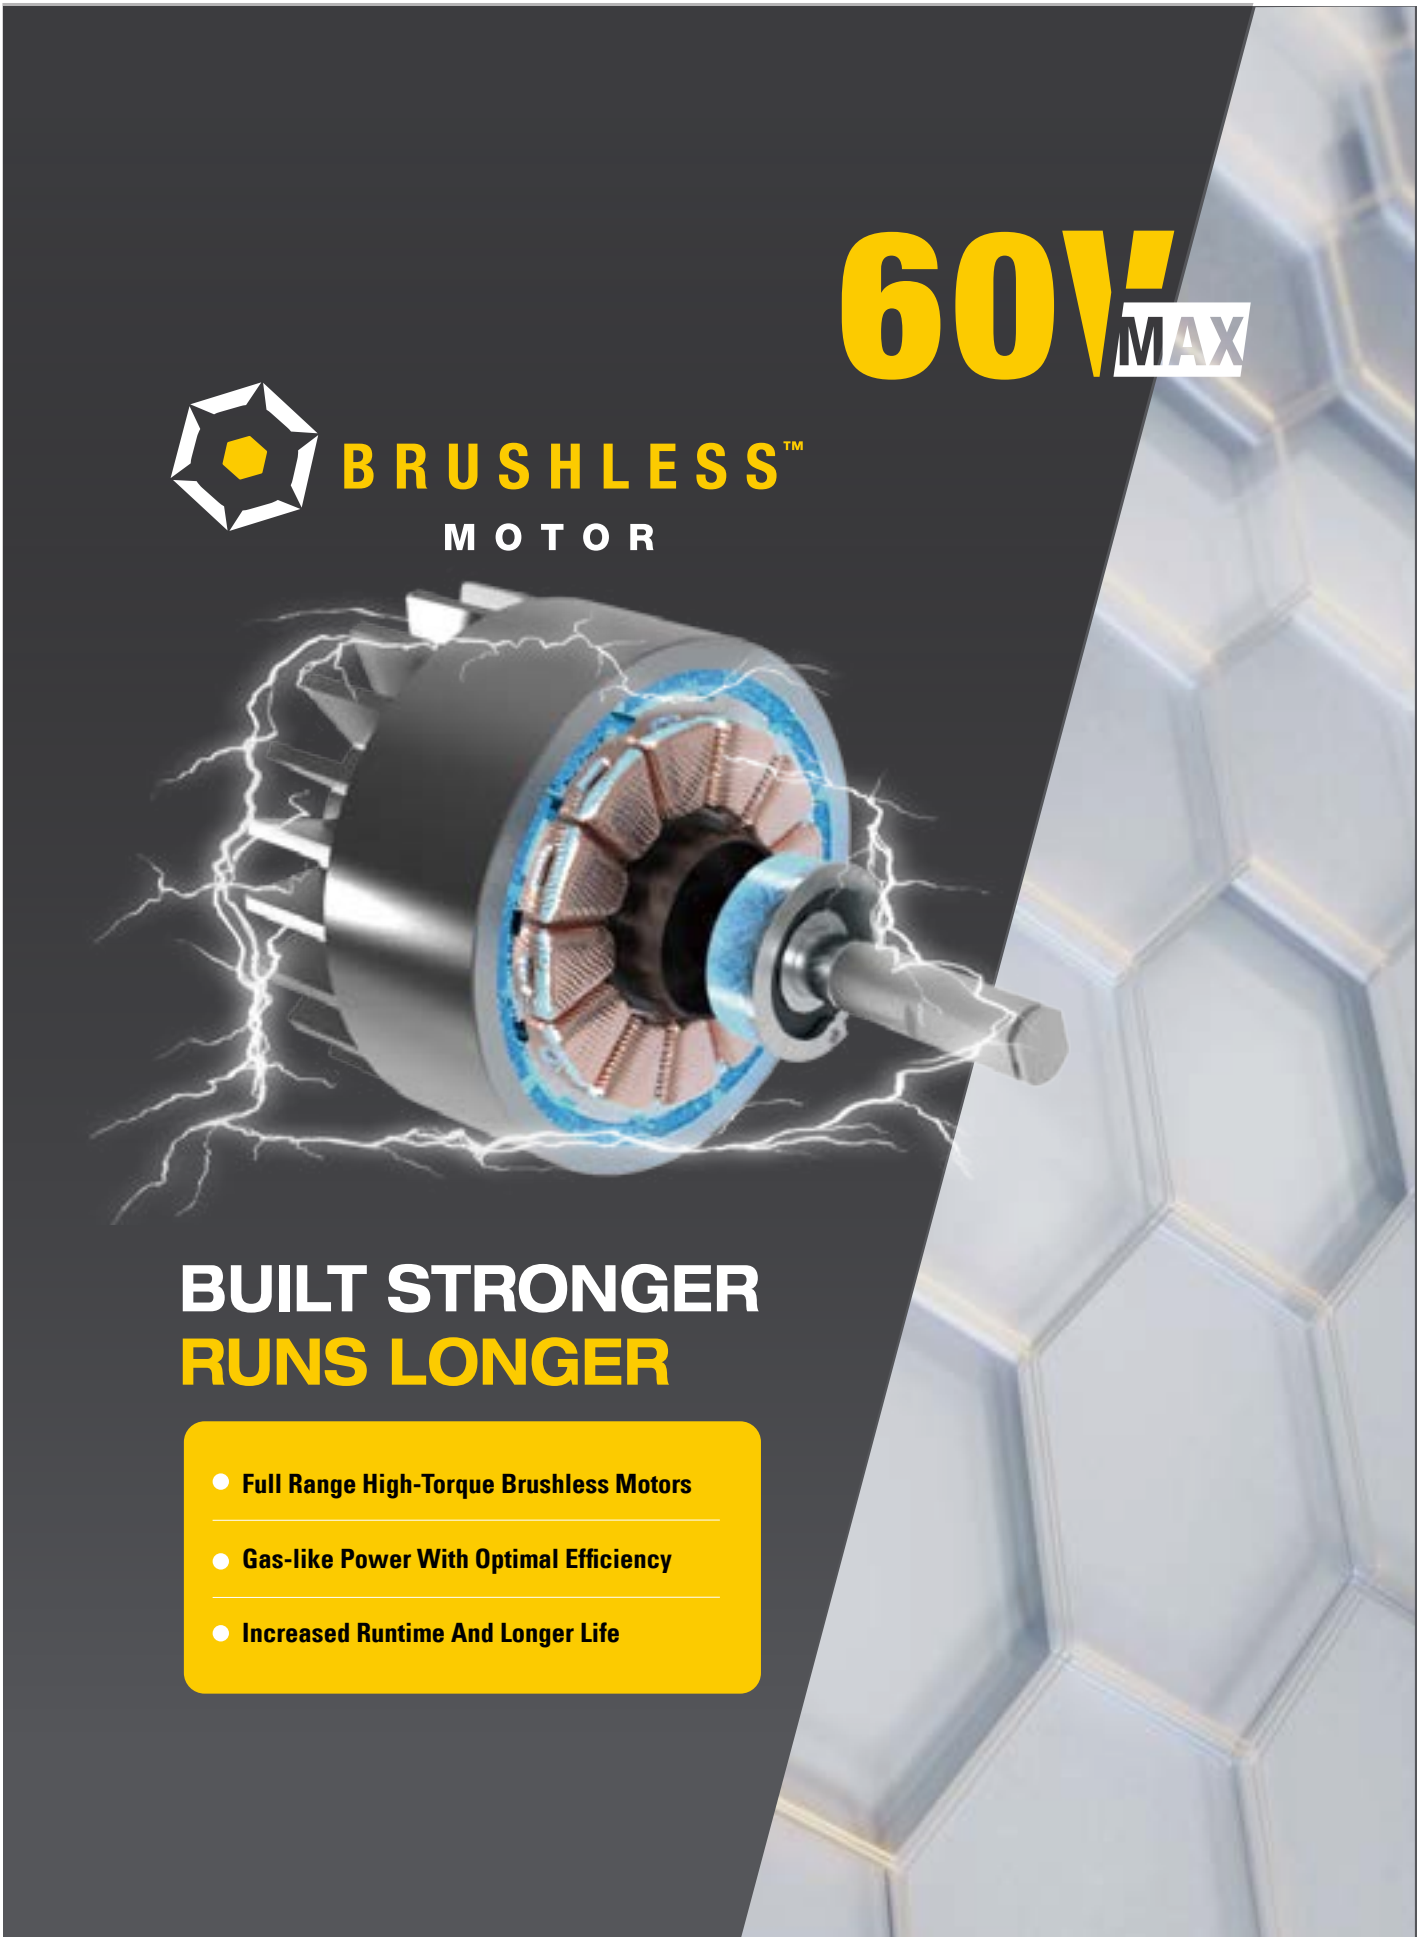

60V^{MAX}

 **BRUSHLESS™**
MOTOR

BUILT STRONGER
RUNS LONGER


- Full Range High-Torque Brushless Motors
- Gas-like Power With Optimal Efficiency
- Increased Runtime And Longer Life

ADVANCED BATTERY TECHNOLOGY

CELL PROTECT: INCREASED PROTECTION FROM IMPACTS, DROPS, AND VIBRATION.

HDPE THERMOPLASTIC MATERIAL IS ENGINEERED TO PROVIDE HIGH POWER AND KEEP CELLS COOL FOR LONGER RUN TIME.

INTELLIGENCE BUILT IN: COMMUNICATION WITH TOOL PROVIDES PEAK BATTERY PERFORMANCE AND WITH CHARGER FOR FASTER CHARGING.

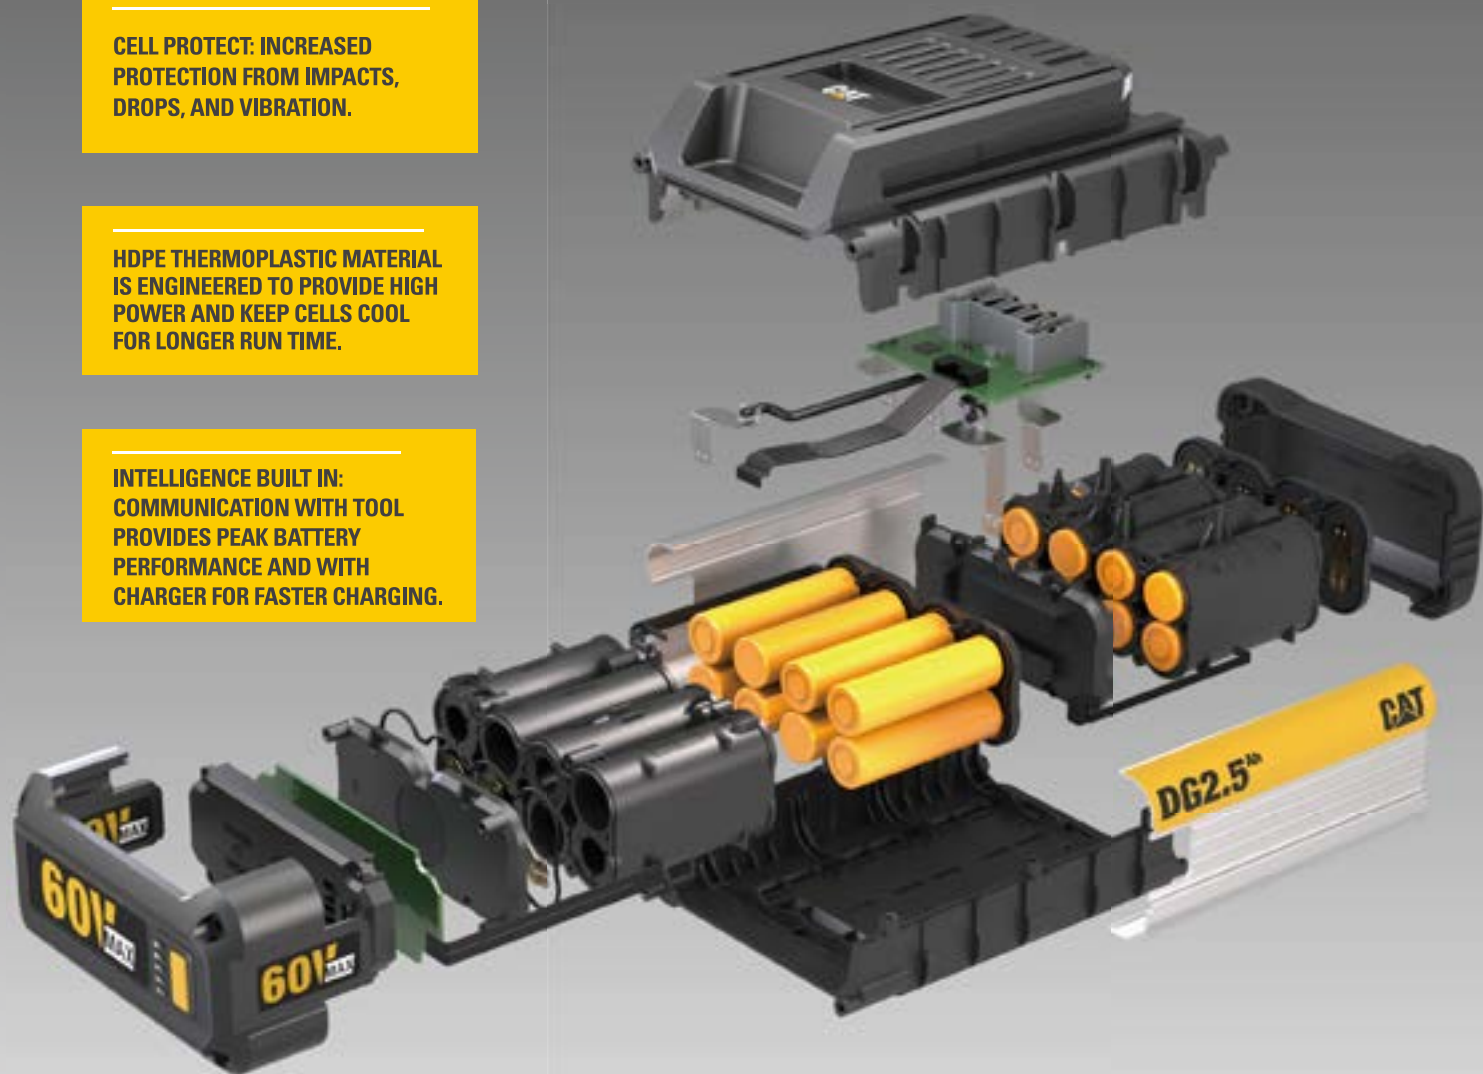

The CAT battery is a key component of an intelligent ECO system of battery powered products. SmartLink is the brain of the CAT 60V battery pack, managing charging, discharging, voltage reporting, temperature and state of health. TEMP Control fullyencapsulates every cell to draw heat away, allowing cells to stay cooler longer, increasing efficiency and run time. CELL Protection that fully encloses each cell provides increased security against vibration, impact, water entrance and thermal runaway.

60V^{MAX}

DG6B25 60V 2.5AH BATTERY

SPECIFICATIONS

| | |
|------------------|--|
| Voltage | 60V |
| Battery capacity | 2.5Ah |
| Charging time | 30mins(Work with Charger DG6C5) 30mins(Work with Charger DG6C8) |
| Machine weight | 1.55Kg |

2.5Ah
LI-ION



DG6B5 60V 5AH BATTERY

SPECIFICATIONS

| | |
|------------------|--|
| Voltage | 60V |
| Battery capacity | 5Ah |
| Charging time | 60mins(Work with Charger DG6C5) 40mins(Work with Charger DG6C8) |
| Machine weight | 2.8Kg |

5.0Ah
LI-ION



DG6C5 5 AMP BATTERY CHARGER

SPECIFICATIONS

| | |
|---------------------|---|
| Output voltage | 60V |
| Max. Output Current | 5A |
| Input Power | 350W |
| Charging time | 2.5Ah (DG6B25) 30 mins 5.0Ah (DG6B5) 60 mins |
| Machine weight | 1.7Kg |



DG6C8 8 AMP DUAL BATTERY CHARGER

SPECIFICATIONS

| | |
|---------------------|--|
| Output voltage | 60V |
| Max. Output Current | 8A |
| Input Power | 580W |
| Charging time | 2.5Ah(DG6B25)—1/2pc 30/40mins 5.0Ah (DG6B5)—1/2pc 40/75mins |
| Machine weight | 2.8Kg |



DG610 60V Brushless 15" String Trimmer



FEATURE

- High-efficiency outer rotor brushless motor delivers 40% more power than standard brushless motors
- Quick line loading with a simple twist of a knob-dual-exit .095 in. bump feed head
- Grass shield protects operator from dirt and debris while limiting line length to 15 in
- ECO mode extends battery life and is great for trimming in delicate areas

SPECIFICATIONS

| | |
|------------------|--|
| Rated voltage | 60V max |
| Battery capacity | 2.5Ah |
| Line diameter | .095" |
| Cutting head | Quick load dual line bump feed head |
| Cut path | 15" |
| Charger | 3A |
| Run time | Up to 40min.(2.5Ah Battery) |
| Product weight | 9.9lbs(with battery) /6.6lbs.(tool only) |

ACCESSORIES

- 1pc Grass shield
- 1pc Quick load head
- 1pc 60V 2.5Ah Battery pack
- 1pc 3A Charger



DG620 60V Brushless 25" Backpack Hedge Trimmer



FEATURE

- Backpack battery removes the weight of the battery from the tool allowing for easier trimming andsculpting
- High-efficiency outer rotor brushless motor delivers 40% more power than standard brushless motors
- Ergonomic rotating rear handle makes any cutting position easy and comfortable
- 2-Speed control.The low-speed setting is ideal for light trimming.The high-speed setting cuts at up to 3,200spm for trimming dense shrubs
- Laser cut 25" dual edge blade offers a clean cut on every branch
- Better than gas. High-performance without the noise, maintenance, and fumes
- Blade guard offers protection nera handle area

SPECIFICATIONS

| | |
|----------------------|---------|
| Rated voltage | 60V max |
| Max.cutting diameter | 1.3" |
| Strokes per minute | 3200 |
| Blade length | 25" |
| Tooth spacing | 1.6" |
| Product weight | 7.9lbs |

ACCESSORIES

- 1pc Blade sheath
- 1pc 60V 2.5Ah Battery pack
- 1pc 3A Charger



DG630

60V Brushless 16" Chainsaw

2.5Ah

LI-ION

BRUSHLESS™

MOTOR

16

INCH BAR™

TOOL-LESS

CHAIN TENSIONING™

FEATURE

- High-efficiency outer rotor brushless motor delivers 40% more power than standard brushless motors
- Tool-less chain tensioning for perfect chain tension every time
- Automatic chain oiler
- Worry free bar & chain lubrication for less wear & tear
- Reduce kickback bar nose
- Small radius bar nose for enhanced safety
- Better than gas
- High-performance without the noise, maintenance, and fumes

SPECIFICATIONS

| | |
|------------------|-------------|
| Rated voltage | 60V max |
| Battery capacity | 2.5Ah |
| Chain pitch | 3/8" |
| Chain | 3/8"Lp |
| Chain size | 16" |
| Chain speed | 68.9ft./sec |
| Chain brake | Inertia |
| Product weight | 13.1lbs |

ACCESSORIES

- 1pc 16" chain & bar
- 1pc Blade sheath
- 1pc 60V 2.5Ah Battery pack
- 1pc 3A Charger



DG631

60V Brushless 18" Chainsaw

5.0Ah

LI-ION

BRUSHLESS™

MOTOR

18

INCH BAR™

TOOL-LESS

CHAIN TENSIONING™

FEATURE

- High-efficiency outer rotor brushless motor delivers 40% more power than standard brushless motors
- Tool-less chain tensioning for perfect chain tension every time
- Automatic chain oiler
- Worry free bar & chain lubrication for less wear & tear
- Reduce kickback bar nose
- Small radius bar nose for enhanced safety
- Better than gas
- High-performance without the noise, maintenance, and fumes

SPECIFICATIONS

| | |
|------------------|-------------|
| Rated voltage | 60V max |
| Battery capacity | 5Ah |
| Chain pitch | 3/8" |
| Chain | 3/8"Lp |
| Chain size | 18" |
| Chain speed | 78.7ft./sec |
| Chain brake | Inertia |
| Product weight | 16.3lbs |

ACCESSORIES

- 1pc 18" chain & bar
- 1pc Blade sheath
- 1pc 60V 5Ah Battery pack
- 1pc 3A Charger



DG650

60V Brushless 700 CFM Leaf Blower

2.5Ah

LI-ION

BRUSHLESS™

MOTOR

VARIABLE

AIR

CONTROL™

700

CFM

135

MPH

FEATURE

- High-efficiency outer rotor brushless motor delivers 40% more power than standard brushless motors
- Adjustable speed control allows the user to choose the power needed for clearing light or heavy yard debris and leaves
- In-line axial fan for extreme power and efficiency
- Turbo mode provides an additional boost at the push of a button for those heavy-duty blower needs

SPECIFICATIONS

| | |
|----------------------|----------------------------|
| Rated voltage | 60V max |
| MAX air volume | 700 cfm |
| MAX airspeed | 135 mph |
| Variable air control | Operator controlled nozzle |
| Run time | Up to 50 min |
| Unit weight | 8.3 lbs |

ACCESSORIES

- 1pc 60V 2.5Ah Battery pack
- 1pc 3A Charger



DG651

60V Brushless 800 CFM Leaf Blower

5.0Ah

LI-ION

BRUSHLESS™

MOTOR

VARIABLE

AIR

CONTROL™

800

CFM

170

MPH

FEATURE

- High-efficiency outer rotor brushless motor delivers 40% more power than standard brushless motors
- Adjustable speed control allows the user to choose the power needed for clearing light or heavy yard debris and leaves
- In-line axial fan for extreme power and efficiency
- Turbo mode provides an additional boost at the push of a button for those heavy-duty blower needs

SPECIFICATIONS

| | |
|----------------------|----------------------------|
| Rated voltage | 60V max |
| MAX air volume | 800 cfm |
| MAX airspeed | 170 mph |
| Variable air control | Operator controlled nozzle |
| Run time | Up to 110 min |
| Unit weight | 11 lbs |

ACCESSORIES

- 1pc 60V 5Ah Battery pack
- 1pc 3A Charger



DG67060V Brushless 21" Push Lawn Mower



FEATURE

- High-efficiency outer rotor brushless motor delivers 40% more power than standard brushless motors
- Dual battery port is ideal for customers with large cutting requirements and includes an additional port for spare battery storage
- Single-lever cutting-height adjustments raise or lower the entire cutting deck from just one location
- Mulch/bag lever quickly switches from mulching to bagging, no plug required
- TorqLogic feature maintains cutting power under difficult mowing conditions like denser grass

SPECIFICATIONS

| | |
|---------------------|----------------------------------|
| Rated voltage | 60V max |
| Drive System | Push |
| Cutting modes | 3-in-1 Mulch, bag,side discharge |
| Height adjustment | Single lever 7-position(1.5"-4") |
| Collection Capacity | 2 Bushels |
| Battery Capacity | 5.0Ah |

ACCESSORIES

- 1pc Mower bag
- 1pc Discharge shoot
- 1pc 60V 5Ah Battery pack
- 1pc 3A Charger



DG67160V Brushless 21" Self-propelled Lawn Mower



FEATURE

- High-efficiency outer rotor brushless motor delivers 40% more power than standard brushless motors
- Dual battery port is ideal for customers with large cutting requirements and includes an additional port for spare battery storage
- Single-lever cutting-height adjustments raise or lower the entire cutting deck from just one location
- Mulch/bag lever quickly switches from mulching to bagging, no plug required
- TorqLogic feature maintains cutting power under difficult mowing conditions like denser grass
- Self-propelled function with variable speed rear wheel drive allows you to adjust your cutting speedfor a better-quality cut

SPECIFICATIONS

| | |
|---------------------|----------------------------------|
| Rated voltage | 60V max |
| Self-propelled | Rear wheel drive |
| Cutting modes | 3-in-1 Mulch, bag,side discharge |
| Height adjustment | Single lever 7-position(1.5"-4") |
| Collection Capacity | 2 Bushels |
| Battery Capacity | 5.0Ah |

ACCESSORIES

- 1pc Mower bag
- 1pc Discharge shoot
- 1pc 60V 5Ah Battery pack
- 1pc 5A Charger



POWER TOOL ACCESSORIES

**SLIDE
LOCK**
STORAGE TECH



MODULAR DESIGN



IMPACT RESISTANCE
QUALITY



INJECTION CARRY CASE

CAT

GENERAL PURPOSE

24T
Ø184mm (7-1/4")
HW Ø184 X 30 X 2.2mm
Max 7000 RPM



ICONS GUIDE

| | | |
|--|---|--|
|  Durable Tip |  Plywood Cutting |  50CRV |
|  Drilling Plastic |  1.4mm Ultra Thin |  Metal Tube |
|  1/4" Hex Shank |  Granite |  Metal Steel |
|  FTB+F |  Paving Bricks |  Marble |
|  HSS-M2 |  Quick Grinding |  Bricks |
|  MDF |  Laser Welding |  Rebar |
|  Fine Cut |  1.5X Long Life |  Hollow Block |
|  10mm Height |  Split Point Tips |  Paint Removal |
|  Tiles |  Self-Cooling |  Arbor 16/20mm |
|  Gypsum Board |  Universal Fit |  High Precision |
|  Double Row |  Fast Cutting |  Diamond |
|  Concrete Block |  Clean Cut |  Impact Torsion |
|  Quick Flute |  Wood With Nail |  Plywood |
|  HSS-Tin Coated |  Bi-Metal |  Wood Cut |
|  Metal Cutting |  Porcelain |  Down Cut |
|  Fast Cut |  Concrete |  Low Vibration |
|  Nico Carbide Teeth |  Vacuum Brazing | |



SDS-Max Drill Bits



| Part No. | Contents | Pack QTY |
|----------|--|----------|
| DA03904 | SDS-Max Chisel Bits Set (25*400mm Flat Chisel, 50*400mm Chisel, 400mm Point Chisel) | 3pcs Set |

SDS Plus Hard Rock Drill Bits



FEATURES

- Superior Tungsten Carbide Tipped**
Ensures better bit penetration with outstanding durability and consistent drilling life
- Centering Tip**
For deep and stable centering
- Wide U shape dust removal channel**
Provides fast dust removal and higher drilling speed and less wear
- Hardened Chrome Vanadium Shank**
Reduces the risk of body bend or broken
- SDS Plus Shrunk bit**
- Suitable for use with all Hammer Drills**
Can drill for most masonry applications such as natural or artificial stone, Limestone, concrete, brick and blockwork etc



| Part No. | Size(mm) | Working Length(mm) | Pack QTY |
|----------|-------------|--------------------|----------|
| DA03001 | 5.5 x 110mm | 55mm | Pack 1 |
| DA03002 | 5.5 x 160mm | 80mm | Pack 1 |
| DA03003 | 6 x 110mm | 55mm | Pack 1 |
| DA03004 | 6 x 160mm | 80mm | Pack 1 |
| DA03005 | 7 x 110mm | 80mm | Pack 1 |
| DA03006 | 7 x 210mm | 130mm | Pack 1 |
| DA03007 | 8 x 260mm | 180mm | Pack 1 |
| DA03008 | 10 x 260mm | 180mm | Pack 1 |
| DA03009 | 12 x 260mm | 180mm | Pack 1 |
| DA03010 | 12 x 450mm | 370mm | Pack 1 |
| DA03011 | 14 x 260mm | 180mm | Pack 1 |
| DA03012 | 16 x 260mm | 180mm | Pack 1 |
| DA03013 | 18 x 450mm | 370mm | Pack 1 |
| DA03014 | 20 x 450mm | 370mm | Pack 1 |
| DA03015 | 22 x 450mm | 370mm | Pack 1 |
| DA03016 | 25 x 450mm | 370mm | Pack 1 |


SDS Plus Drill Bits



| Part No. | Contents | Pack QTY |
|----------|--|-----------|
| DA03901 | SDS Plus Drill Bits 3 x 110mm (Ø5mm,6mm,6mm), 7 x 160mm (Ø6mm,7mm, 8mm,9mm,10mm,12mm) | 10pcs Set |
| DA03902 | 12 x SDS Plus Drill Bits (Ø5 x 110, 5.5 x 110, 6 x 110, 8 x 110, 10 x 110, 6 x 160, 7 x 160, 8 x 160, 10 x 160, 8 x 210, 10 x 210 ,14 x 260mm), 2 x Point Chisels, 2 x Flat Chisels (20 x 140mm, 20 x 250mm) Scaling Chisel | 17pcs Set |

| Part No. | Contents | Pack QTY |
|----------|--|----------|
| DA03903 | SDS Plus Chisel Bits Set (20mm Chisel, 40mm Chisel, Point Chisel) | 3pcs Set |

Hard Surface Masonry Drill Bits



FEATURES

- Centering tip
For deep and stable centering
- Superior Tungsten Carbide tipped
Ensures better bit penetration with outstanding durability and consistent drilling life
- Wide U flute shape dust removal channel
Provides fast dust removal and higher drilling speed and less wear
- Hardened Chrome Vanadium Shank
Reduces the risk of body bend or broken
- Straight Shrank Bits
Suitable for use with all Impact Drills




| Part No. | Size(mm) | Working Length (mm) | Pack QTY |
|----------|----------------------------|---------------------|----------|
| DA04001 | 5 x 85mm | 50mm | Pack 1 |
| DA04002 | 5.5 x 150mm | 90mm | Pack 1 |
| DA04003 | 6 x 100mm | 60mm | Pack 1 |
| DA04004 | 6 x 150mm | 90mm | Pack 1 |
| DA04005 | 6.5 x 100mm | 60mm | Pack 1 |
| DA04006 | 6.5 x 150mm | 90mm | Pack 1 |
| DA04007 | 7 x 100mm | 60mm | Pack 1 |
| DA04008 | 7 x 150mm | 100mm | Pack 1 |
| DA04009 | 8 x 150mm | 100mm | Pack 1 |
| DA04010 | 10 x 150mm | 100mm | Pack 1 |
| DA04011 | 12 x 150mm | 100mm | Pack 1 |
| Part No. | Size(mm) | | Pack QTY |
| DA04901 | Ø3, 4, 5, 6, 7, 8, 9, 10mm | | 8pcs Set |

Titanium Coated HSS Drill Bits



FEATURES

- 135° Split Point Tips*
Provide active cutting and accurate centering without wandering
- Titanium-Coated HSS
For improved accuracy and longer working life
- Fully-Ground HSS
Ensures high quality drill body with fast waste removal and wear resistance for long life
- Hardened HSS
Process for superb strength, easier drilling metal wood and plastic

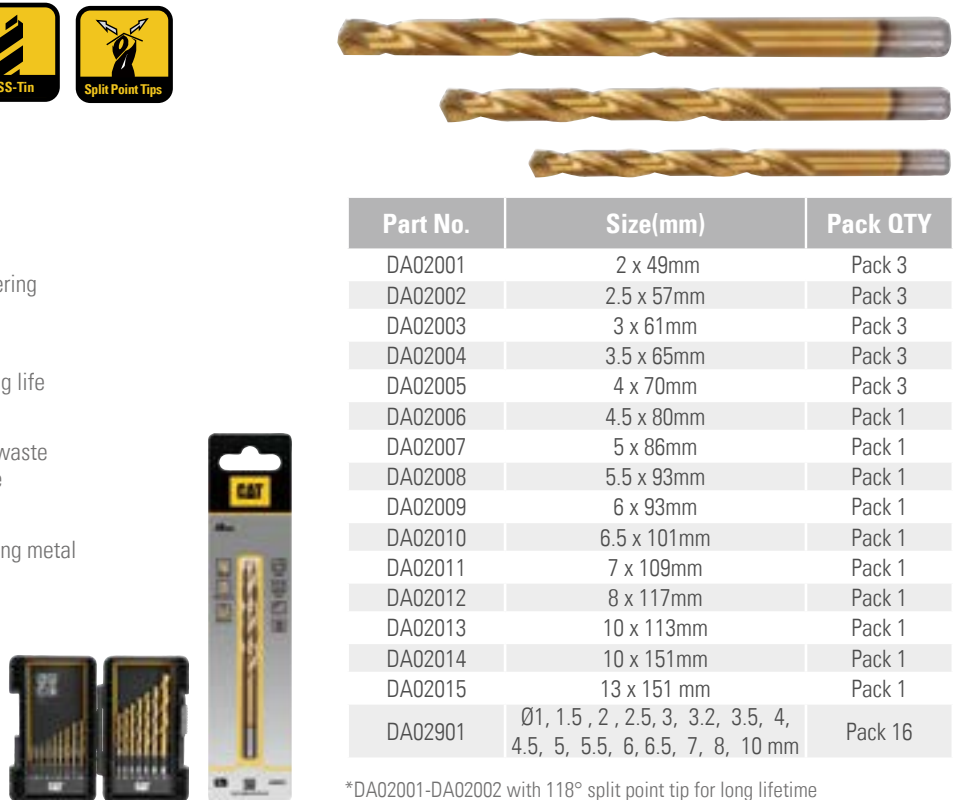

| Part No. | Size(mm) | Pack QTY |
|----------|--|----------|
| DA02001 | 2 x 49mm | Pack 3 |
| DA02002 | 2.5 x 57mm | Pack 3 |
| DA02003 | 3 x 61mm | Pack 3 |
| DA02004 | 3.5 x 65mm | Pack 3 |
| DA02005 | 4 x 70mm | Pack 3 |
| DA02006 | 4.5 x 80mm | Pack 1 |
| DA02007 | 5 x 86mm | Pack 1 |
| DA02008 | 5.5 x 93mm | Pack 1 |
| DA02009 | 6 x 93mm | Pack 1 |
| DA02010 | 6.5 x 101mm | Pack 1 |
| DA02011 | 7 x 109mm | Pack 1 |
| DA02012 | 8 x 117mm | Pack 1 |
| DA02013 | 10 x 113mm | Pack 1 |
| DA02014 | 10 x 151mm | Pack 1 |
| DA02015 | 13 x 151mm | Pack 1 |
| DA02901 | Ø1, 1.5, 2, 2.5, 3, 3.2, 3.5, 4, 4.5, 5, 5.5, 6, 6.5, 7, 8, 10mm | Pack 16 |


*DA02001-DA02002 with 118° split point tip for long lifetime

Vacuum Brazed Diamond Tile Drill Bits



FEATURES

- Industrial Diamond brazed tipped
For a professional quality finish clean, precise holes, without chipping tiles
- Wax filled centre coolant system
That absorbs the heat, melts and begins lubrication process, improves tool life and speed of drilling
- Tough 45# steel Body
Does not bend distort easily
- No need water, Self-Cooling, Self-Sharpening, Fast Drilling Speed
- 1/4" Hex Shrank
Can be used with Drill Driver & Impact Drivers, Optimum speed 2 000-3 000rpm

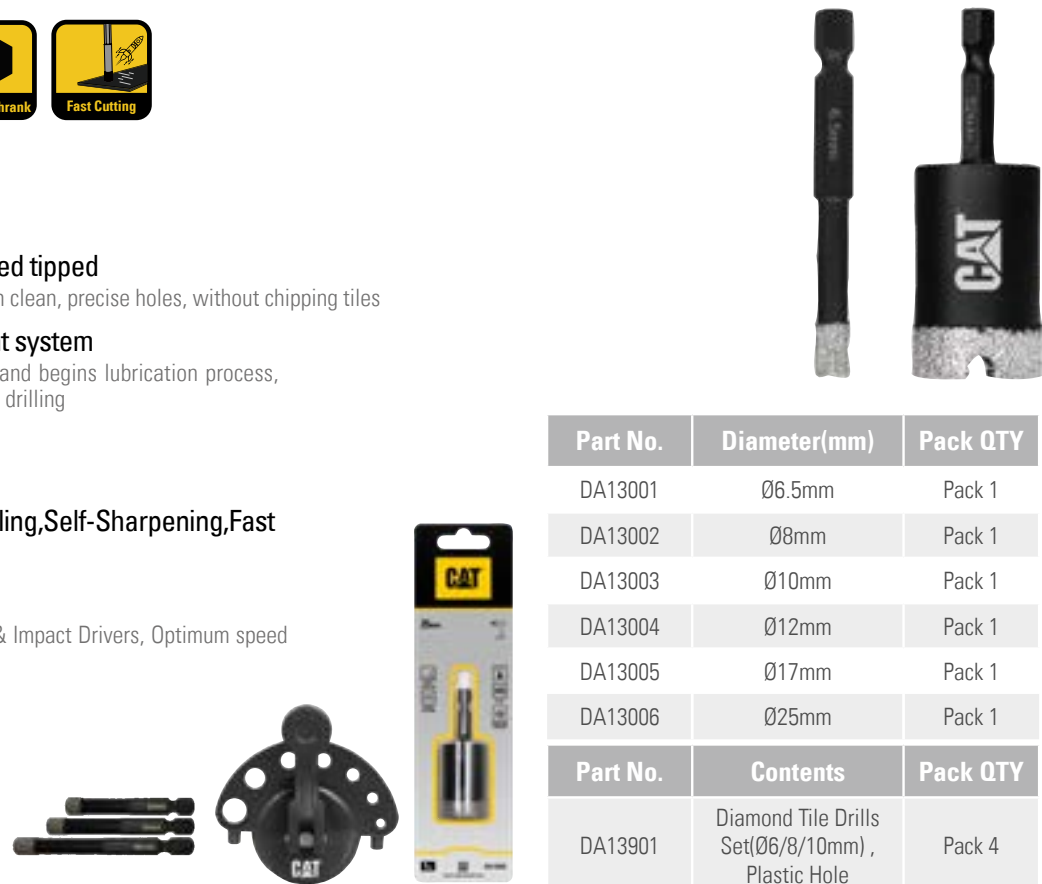

| Part No. | Diameter(mm) | Pack QTY |
|----------|--|----------|
| DA13001 | Ø6.5mm | Pack 1 |
| DA13002 | Ø8mm | Pack 1 |
| DA13003 | Ø10mm | Pack 1 |
| DA13004 | Ø12mm | Pack 1 |
| DA13005 | Ø17mm | Pack 1 |
| DA13006 | Ø25mm | Pack 1 |
| Part No. | Contents | Pack QTY |
| DA13901 | Diamond Tile Drills Set(Ø6/8/10mm), Plastic Hole | Pack 4 |

Wood Flat Drill Bits Set



FEATURES

- Suitable for use drill & Impact drivers
Can for rapid drilling holes in natural hard and soft wood, chipboard and other light building materials
- 1/4" Hex Shank
- Harden High-Carbon steel body
- Precision-Ground 3-Point Tip and angled cutting edges
For faster, more cleaner and accurate dimensional stability drilling

| Part No. | Contents | Pack QTY |
|----------|--|----------|
| DA05901 | 8 x 152mm Flat Wood Bits (Ø12, 16, 18, 20, 22, 25, 28, 32mm) | Pack 8 |





Diamond Tip Torsion Screwdriver Bit



FEATURES

- 1/4" Hex Shrank, Premium performance impact screwdriver bits
- Cold-forged with Notching grip Tipped
Provides enhance friction to reduce cam-out risk from screw head
- Impact Torsion
Design for the ability to twist and flex under stress
- Titanium-coated prevents bits rust and great appearance
- Magnetic bit for easy to use

| Part No. | Spec | length(mm) | Pack QTY |
|----------|------|------------|----------|
| DA01001 | PZ2 | 25mm | Pack 2 |
| DA01002 | PZ2 | 25mm | Pack 2 |
| DA01003 | PZ3 | 25mm | Pack 2 |
| DA01004 | PZ2 | 50mm | Pack 2 |
| DA01005 | PZ2 | 50mm | Pack 2 |
| DA01006 | PZ3 | 50mm | Pack 2 |



32pcs 1/4" Hex Screwdriver Bits Kit

FEATURES

- 1/4" Hex Shrank, S2 Modified Steel
- Heat-Treated for durability & toughness
- Color coded to easy identification
- Supplied in SlideLock robust plastic Injection Case

| Part No. | Contents | Pack QTY |
|----------|---|-----------|
| DA01901 | Magnetic Bit Holder, 30 x 25mm Screwdriver Bits (2 x PZ#1, 6 x PZ#2, 2 x PZ#3, 2xPH1, 6 x PH2, 2 x PH3, SL3, SL4, SL5, SL6, T15, T20, T25, T27, T30, T40), 1/4" Hex Bit | 32pcs Set |



45pcs Mixed Screwdriver Bits Kit

FEATURES

- ¼” Hex Shrank,S2 Modified Steel
- Heat-Treated for durability & toughness
- Color coded to easy identification
- Manganese phosphate coated prevents Bits rust
- Supplied in SlideLock robust plastic Injection Case



| Part No. | Contents | Pack QTY |
|----------|--|-----------|
| DA01902 | 32 x 25mm Bits(PH1, 3 x PH2, PH3, PZ1, 3 x PZ2, PZ3, Hex3, Hex4, Hex5 , Hex6, SL3, SL4, SL5, SL6, 8 x TX bits TX10, TX15, TX20, TX20, TX25, TX27, TX30, TX40,TH10, TH15, TH20, TH25, TH30, TH40), 6 x 50mm Bits(PH2, PZ2, SL5.5,TX15, TX20, TX25), 2 x 89mm Bits(PH2,PZ2), 2 x 45mm Magnetic Nutdrivers (7,8 ,10mm), 60mm magnetic bit holder, 65mm Socket Adapter - 3/8" Drive | 45pcs Set |

Quick-Release Magnetic Bit Holder



FEATURES

- ¼” Hex shrink
Use with ¼" hex insert bits suitable for use with impact drivers, drills
- Quick-release Retracting
For quick and easy bit change
- Hardened high quality steel
For maximum durability and flexibility
- Strong magnetic tip
For secure grip
- Solid construction
Withstands abuse in impact applications



| Part No. | Description | Pack QTY |
|----------|---|----------|
| DA01007 | Impact Quick-Release Magnetic Bit Holder 65mm | Pack 1 |

3/8” Drive Impact Socket Kit- 3pcs

FEATURES

- With 3/8” square drive
For use with cordless and impact drivers
- High strength chrome molybdenum alloy steel
Offering a combination of endurance and impact resistance
- Heat treated for harden
- 6-Point Head



| Part No. | Contents | Pack QTY |
|----------|-----------------------------|----------|
| DA01008 | 3/8" Drive(8mm, 10mm, 13mm) | 3pcs Set |

201pcs Combination Drill Bit Set



FEATURES

- Suitable for use most drill drivers,
Can work for drilling metal, wood and plastic
- Includes
 - 21 Metal twist Drill bits: (1.5/2/2.5/3/3.5/4/4.5/5/5.5/6/8mm)
 - 6 Brad Point Drill Bits: (3/4/5/6/8/10mm)
 - 6 Masonry Drill Bits: (3/4/5/6/8/10mm)
 - 4 Spade Bits: (12/16/18/20mm)
 - 15 Wall Anchors
 - 13 Wood Screw
 - 70 25mm Insert Bits: PH, SL, SQ, TORX, HEX
 - 40 50mm Power Bits: PH, SL, SQ, TORX, HEX
 - 2 Drill Stoppers 6/8mm
 - 10 Nutdrivers: (5/5.5/6/7/8/9/10/11/12/13mm)
 - 1 Screw Finder
 - 10 Allen Keys: (1.5/2/2.5/3/4/5/5.5/6/8/10mm)
 - 1 Magnetic Bit Holder
 - 1 Countersink Bit
 - 1 Quick Connect Holder



| Part No. | Description | Pack QTY |
|----------|-----------------------|------------|
| DA01903 | 201 pcs Mixed Bit Set | 201pcs Set |

SAW BLADES

GENERAL PURPOSE

24T
Ø184mm (7-1/4")
HW Ø184 X 30 X 2.2mm
Max 7000 RPM

IDEAL FOR CORDLESS

6X LONGER LASTING
ULTRA THIN KERF
Ø184mm

METAL

WOOD

METAL

BIM

50CrV

HSS-M2

HARDWOOD

PARTICLE BOARD

PLYWOOD

LAMINATE

MDF

ALUMINIUM

STEEL (up to 6mm)

PLASTIC

TCT Circular Saw Blade-Multipurpose



FEATURES

- Construction grade Nico Teeth Carbide tip
Brings up to 6times more cuts than regular blades
- Anti-Friction Coating
Reduce cutting friction and prevent blade jamming,and rust protection
- Optimized tooth geometry
Ensure multipurpose cut,last longer and less kick-back
- Specially designed Anti-vibration slots
Reduction of vibration enable smooth running,less noise
- Expansion slots
Reduced expansion/ Dampen noise/ Less heat
- Stable 75CR1 Steel Blade Base
For less vibration and stable cutting
- Standard 30mm bore with 16/20mm Reduction Rings



| Part No. | Type | Description | Pack QTY |
|----------|--------------|--|----------|
| DA08201 | Multipurpose | Multipurpose TCT Blade For Wood, Metal, Plastic, Copper Ø184mm (7-1/4")X 30 X 1.6mm,Max 7000 RPM, Teeth 24 | Pack 1 |
| DA08202 | Multipurpose | Multipurpose TCT Blade For Wood, Metal, Plastic, Copper Ø184mm (7-1/4")X 30 X 1.6mm,Max 7000 RPM, Teeth 40 | Pack 1 |

TCT Circular Saw Blade-Thin Kerf



FEATURES

- General purpose blade for rip and cross cutting
Hard wood, soft wood, particle board , Laminate , Plywood etc
- Harden 65Mn Steel Blade Base
For less vibration and stable cutting
- High quality Carbide teeth
Ensure optimal lifetime and smooth cutting characteristics
- Auto brazing and grinding teeths
for consistent durability
- Expansion slots in blade
Help reduce vibration and noise
- Standard 30mm bore with 16/20mm Reduction Rings



| Part No. | Type | Description | Pack QTY |
|----------|-----------------|--|----------|
| DA08001 | General Purpose | General Purpose TCT Blade, For Rip and Cross Cut, Ø184mm (7-1/4")X 30 X 2.2mm,Max 7000 RPM, Teeth 24 | Pack 1 |
| DA08002 | General Purpose | General Purpose TCT Blade, For Rip and Cross Cut, Ø184mm (7-1/4")X 30 X 2.2mm,Max 7000 RPM, Teeth 40 | Pack 1 |



Jig Saw Blades



FEATURES

- Selected popular type blades
Will cater main applications, regardless of required precision, stability and speed
- Ground teeth
Provides efficiency and accurate wood cutting performance than milled
- Heat treated steel for stable cutting
- T-Shank Fitting



| Part No. | Application | Cut Type | Type | Material | Overall Length (mm) | Working Length (mm) | Depth of Cut(mm) | Tooth Distance (mm) | Tooth Pitch (mm) | PACK QTY |
|----------|-------------------------|-------------------|---|----------|---------------------|---------------------|------------------|---------------------|------------------|----------|
| DA06001 | Wood | Fast Straight | T144D | 50CRV | 100mm | 75mm | 5-50 | 4mm | 6tpi | Pack 5 |
| DA06002 | Wood | Accurate Straight | T144DP | 50CRV | 100mm | 75mm | 5-50 | 4mm | 6tpi | Pack 5 |
| DA06003 | Wood | Clean Cut | T101B | 50CRV | 100mm | 75mm | 3-30 | 2.5mm | 10tpi | Pack 5 |
| DA06004 | Wood | Reverse Clean Cut | T101BR | 50CRV | 100mm | 75mm | 3-30 | 2.5mm | 10tpi | Pack 5 |
| DA06005 | Metal | Fine Cut | T118A | HSS-M2 | 75mm | 50mm | 1-3 | 1.2mm | 21tpi | Pack 5 |
| DA06006 | Metal | Coarse Cut | T118B | HSS-M2 | 75mm | 50mm | 2.5-6 | 2mm | 12tpi | Pack 5 |
| Part No. | Description | | Contents | | | | | | | Pack QTY |
| DA06901 | Wood & Metal Basic Set | | 2 x T119B0, 2 x T119B, 2 x T111C, 1 x T218A, 1 x T118G, 1 x T118A, 1 x T118B | | | | | | | Pack 10 |
| DA06902 | Professional Wood Set | | 1 x T101A0, 1 x T101B, 1 x T101BR, 1 x T101A0F, 1 x T101BF, 1 x T101BRF, 1 x T244D, 1 x T144D, 1 x T144DF, 1 x T144DP | | | | | | | Pack 10 |
| DA06903 | Wood & Metal Robust Set | | 1 x T244D, 1 x T144D, 1 x T101A0, 1 x T101B, 1 x T101A0F, 1 x T101BF, 1 x T118E0F, 1 x T118AF, 1 x T118BF, 1 x T123X | | | | | | | Pack 10 |


Reciprocating Saw Blades



FEATURES

- Selected popular type blades
Accuracy, stability and speed are excellent
- Universal shank
Fits all major brands
- Construction grade blades
For flexibility and durability with wider bodies for greater stability

| Part No. | Application | Cut Type | Type | L(mm) | Tpi | Pack QTY |
|----------|-------------|----------------|---------|-------|-----|----------|
| DA07001 | Wood | Clean Cut | S644D | 152 | 6 | Pack 2 |
| DA07002 | Wood | Fast Clean cut | S1531L | 240 | 5 | Pack 2 |
| DA07003 | Wood&Metal | Fast Cut | S922HF | 150 | 10 | Pack 2 |
| DA07004 | Metal | Fine Cut | S922EF | 150 | 18 | Pack 2 |
| DA07005 | Metal | Fast Cut | S1122HF | 228 | 10 | Pack 2 |

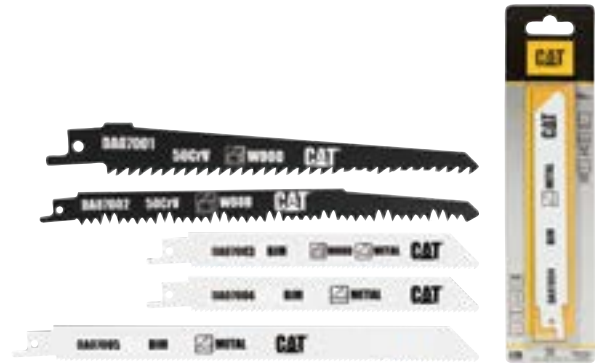

| Part No. | Description | Content Details | Pack QTY |
|----------|---|--|----------|
| DA07901 | 8pcs Rep Saw Blade Set (Wood/Plastic/Metal) | 2 x S1531L (L x W x Th: 240 x 19 x 1.3mm, 5tpi) 2 x S644D (L x W x Th: 150 x 19 x 1.25mm, 6tpi) 2 x S922HF (L x W x Th: 150 x 19 x 1mm, 10tpi) 2 x S922EF (L x W x Th: 150 x 19 x 1mm, 18tpi) | PACK 8 |

DIAMOND ACCESSORIES



THE SYMBOL OF SAFETY

ALLIANCE FOR SAFETY AND QUALITY - THE ORGANIZATION FOR THE SAFETY OF ABRASIVES

oSa stands for **Organisation for the Safety of Abrasives**. Leading producers of high-grade abrasive products have come together in this international organization to document the high safety standards of their branded and quality products. The sole purpose is to ensure that the quality of their products remains consistently high in the interests of abrasive product users. oSa members are committed to sustaining quality assurance and ensuring the adherence to safety standards.

WHAT DOES OSA DO?

As there are no binding safety requirements across the world for abrasive products, users are naturally worried and buying safe abrasives for the many fields of use is made that much more difficult.

To get that urgently needed transparency on the international markets, 17 reputable European companies in the abrasives industry set up the oSa in March 2000. It now has 50 members.

- Whose products meet or surpass the CEN standards of safety requirements for abrasive products
- Which through stipulated testing procedures and conditions ensure that these standards are also kept
- That these standards are also kept, and which accept the checks laid down by oSa

Diamond Cutting Disc– Thin Turbo



FEATURES

- Industrial Diamond with 10mm height segment
Delivers higher friction for 2x fast and longer life
- Latest Bond Technology
Enhances performance,durability and safety cutting
- Ultra Thin Turbo
Provides faster and more precise cutting compared to standard turbo blades
- Turbo grooves
provide a cooling effect when rotating, generating a fast yet smooth cut
- Fully harden and heat treated
Fully harden and heat treated steel core allows true cutting
- Wide Span of application and fast cut
For fast &clean cut for Ceramic / Tiles / Porcelain / Granites and decorative materials
- Standard 22.2mm bore with 20mm Reduction Rings



| Part No. | Type | Description | Pack QTY |
|----------|------------|--|----------|
| DA09031 | Turbo Thin | 115mm, Bore 22.23mm, Thin 1.4mm, Height 10mm | Pack 1 |
| DA09032 | Turbo Thin | 125mm, Bore 22.23mm, Thin 1.4mm, Height 10mm | Pack 1 |

Diamond Cutting Blade – Turbo



FEATURES

- Industrial Diamond with 10mm height segment
Delivers higher friction for 2x fast and longer life
- Latest Bond Technology
Enhances performance,durability and safety cutting
- Turbo grooves
provide a cooling effect when rotating, generating a fast yet smooth cut
- Fully harden and heat treated
Fully harden and heat treated steel core allows true cutting
- Wide Span of application and fast cut
For Hard and General purpose building materials



| Part No. | Type | Description | Pack QTY |
|----------|-------|---|----------|
| DA09011 | Turbo | 115mm,22.23mm Bore, 10mm Height, Thick 2.2mm | Pack 1 |
| DA09012 | Turbo | 125mm,22.23mm Bore, 10mm Height, Thick 2.4mm | Pack 1 |
| DA09013 | Turbo | 230mm,,22.23mm Bore, 10mm Height, Thick 2.6mm | Pack 1 |
| DA09014 | Turbo | 300mm,20mm Bore, 10mm Height, Thick 3.0mm | Pack 1 |
| DA09015 | Turbo | 350mm,Bore 25.4/20mm, Height 10mm,Thick 3.2mm | Pack 1 |

Diamond Cutting Blade – Segmented



FEATURES

- Industrial Diamond with 10mm height segment
Delivers higher friction for 2x fast and longer life
- Latest Bond Technology
Enhances performance,durability and safety cutting
- Fully harden and heat treated
Fully harden and heat treated steel core allows true cutting
- Wide Span of application and fast cut
For General Masonry & Stone, Concrete etc



| Part No. | Type | Description | Pack QTY |
|----------|-----------|---|----------|
| DA09001 | Segmented | 115mm,22.23mm Bore, 10mm Height, Thick 2mm | Pack 1 |
| DA09002 | Segmented | 125mm,22.23mm Bore, , 10mm Height, Thick 2mm | Pack 1 |
| DA09003 | Segmented | 230mm, Bore 22.23mm, 10mm Height, Thick 2.4mm | Pack 1 |
| DA09004 | Segmented | 300mm,Bore 20mm, Height 10mm,Thick 3.0mm | Pack 1 |
| DA09005 | Segmented | 350mm,Bore 25.4/20mm, Height 10mm,Thick 3.2mm | Pack 1 |

Diamond Cutting Blade – Continuous Rim



FEATURES

- Industrial Diamond with 7mm height segment
Delivers higher friction for 2x fast and longer life
- Latest Bond Technology
Enhances performance,durability and safety cutting
- Thin Kref
Provides faster and more precise cutting
- Fully harden and heat treated
Fully harden and heat treated steel core allows true cutting
- Wide Span of application and fast cut
For Fast/Clean Cut for Ceramic/Tiles/ Porcelain/ Granites and decorative materials



| Part No. | Type | Description | Pack QTY |
|----------|----------------|--|----------|
| DA09021 | Continuous Rim | 110mm, Bore 22.23mm, Thin 1.6mm, Height 7mm | Pack 1 |
| DA09022 | Continuous Rim | 115mm, Bore 22.23mm, Thin 1.6mm, Height 7mm | Pack 1 |
| DA09023 | Continuous Rim | 125mm, Bore 22.23mm, Thin 1.6mm, Height 7mm | Pack 1 |
| DA09024 | Continuous Rim | 180mm, Bore 22.23mm, Thin 2.0mm, Height 7mm | Pack 1 |
| DA09025 | Continuous Rim | 200mm, Bore 25.4/22.23mm, Thin 2.0mm, Height 7mm | Pack 1 |

VACUUM BRAZED DIAMOND BONDED TECHNOLOGY

MULTI-PURPOSE

SUITABLE FOR WOOD, STEEL, STONE, CERAMICS, AND OTHER BUILDING MATERIALS



Vacuum Brazed Diamond Blade- Multipurpose



FEATURES

- Industrial Diamond
Selected grit quality and size ensure a multi-application, fast cut and a long lifetime
- Vacuum brazing process
High bonding strength between steel and diamond grit, ensure a durable and safe application
- Blade geometry
Thin body design and expansion slot ensure an unique cutting speed and avoid blade deformation
- One blade allows Multi-purpose applications
Suitable for cutting steel, metal, concrete, bricks, asphalt, tiles, wood, wood with nails, plastic, drywall and other building materials
- Standard 22.2mm bore with 20mm Reduction Ring



CUTS ALL

| Part No. | Description | Pack QTY |
|----------|--|----------|
| DA09052 | Vacuum Brazed Diamond Blade- Multi Purpose Ø115mm x 22.23mm | Pack 1 |

Vacuum Brazed Diamond Blade - Metal Cut



FEATURES


- Self sharpening industrial diamond
- Vacuum brazing process
High bonding strength between steel and diamond grit, ensure a durable and safe application
- Long life with 1000+Cuts
30x longer over resin bonded abrasive wheels Life
- One blade allows most metal applications
Suitable for cutting Steel, INOX, Rebar, Cast Iron, Aluminium, Copper, Plastic, Rubber, Fiber Glass etc.
- Extremely safe no shattering benefits from advanced metal core
- Less odour & dust
Than conventional resin bonded abrasive wheels
- Less sparking in metal cutting
- Standard 22.2mm bore with 20mm Reduction Rings



1000+ CUTS 30x LONGER

| Part No. | Description | Pack QTY |
|----------|--|----------|
| DA09051 | Vacuum Brazed Diamond Blade- Metal Cut Ø115mm x 22.23mm | Pack 1 |

Diamond Concrete Grinding Cup



FEATURES

- For rapid removal
Graffiti and cleaning concrete, masonry, and natural stones.
- High quality industrial diamond
Ensures long lifetime
- Double Row
Results large work area, and longer life time
- Less Vibration and dynamic balance
For best working experience
- Fit for 115mm/125mm Angle Grinders



| Part No. | Description | Bonded Process | Pack QTY |
|----------|---------------------------|----------------|----------|
| DA09041 | Double Row 125mm x 22.2mm | Hot Press | Pack 1 |

8PCS Professional Diamond Core Drill Kit



FEATURES


- High quality industrial diamond
For fast drilling & long life
- Laser welding
Enables continuously and intensively drilling jobs
- Wave shape rooftop segments
For easy start and quick cutting
- Slotted Spiral Barrel enhances dust removal
- Supplied with Cat SlideLock System injection case
- Idea for Dry Use
For fast, clean drilling into masonry, bricks and blocks etc



| Part No. | Contents | Pack QTY |
|----------|---|----------|
| DA09901 | 3 X Diamond Core Drills (Ø38mm, 52mm, 117mm), 200mm Extension Bar, 115mm SDS Adaptor, 90mm 3-Jaw Adaptor, (Ø8 x 205mm) Pilot Drill, 75mm Drift Key | 8pcs Set |



Sanding Sheets & Belts

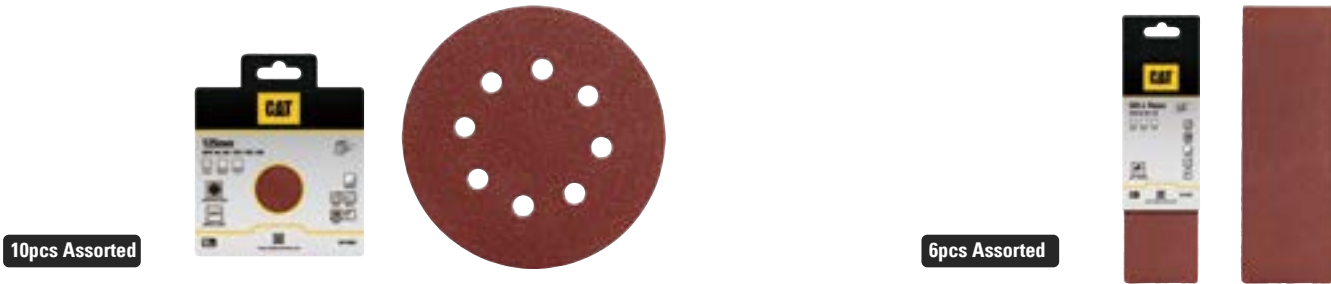

| Part No. | Description | Grit | Pack QTY |
|----------|---|-------------------------------------|----------|
| DA14003 | Rotary / Orbit Sander Discs, 125mm, Hook & Loop Fixing | 2 x (Grit 60, 80, 120, 180, 240) | Pack 10 |

| Part No. | Description | Grit | Pack QTY |
|----------|----------------------------------|---------------------------|----------|
| DA14001 | Cloth Sanding Belts, 533x75mm | 2 x (Grit 60, 80, 120) | Pack 6 |

Sanding Sheets & Belts



FEATURES


- Open coat aluminum oxide abrasive
- Perfectly work with Cat Sanding tools for the highest performance
- Easy to use under Hook & Loop Fixing system
- Widely use
For use on Wood, Paint, Varnish, Plaster, Filler & Metal etc.




10pcs Assorted



| Part No. | Description | Grit | Pack QTY |
|----------|---|------------------------------|----------|
| DA14002 | Corner Sanding Sheets, Hook & Loop Fixing, 95x145mm | 2 x (Grit 60,80,120,180,240) | Pack 10 |



10pcs Assorted



| Part No. | Description | Grit | Pack QTY |
|----------|---|------------------------------|----------|
| DA14004 | 1/4 Sanding Sheets, Hook & Loop Fixing, 102x114mm | 2 x (Grit 60,80,120,180,240) | Pack 10 |



10pcs Assorted



| Part No. | Description | Grit | Pack QTY |
|----------|--|------------------------------|----------|
| DA14005 | 1/3 Sanding Sheets, Hook & Loop Fixing, 93x230mm | 2 x (Grit 60,80,120,180,240) | Pack 10 |



10pcs Assorted



| Part No. | Description | Grit | Pack QTY |
|----------|---|------------------------------|----------|
| DA14006 | 1/2 Sanding Sheets, Hook & Loop Fixing, 115x230mm | 2 x (Grit 60,80,120,180,240) | Pack 10 |



Abrasive Flat Metal & INOX Cutting Disc



FEATURES

- High quality abrasive discs
Bring safety, productivity in metalworking
- Two sides full sheets of fiberglass
For durability and safety
- Standard hub
Allows for fast, tool-free wheel changes
- Proprietary aluminum oxide grain combination
Allows aggressive cutting & more cuts
- Cover a wide range of metal cutting applications

| Part No. | Material | Work Type | Type | Description | Pack QTY |
|----------|-------------|-----------|------|--|----------|
| DA10128 | Metal &INOX | Cutting | Flat | Ø105 x 1.2 x 16 mm (4" x 3/64" x 5/8") | Pack 10 |
| DA10115 | Metal &INOX | Cutting | Flat | Ø115 x 1.0 x 22.23 mm (4-1/2" x 0.04" x 7/8") | Pack 10 |
| DA10116 | Metal &INOX | Cutting | Flat | Ø115 x 1.6 x 22.23 mm (4-1/2" x 1/16" x 7/8") | Pack 10 |
| DA10117 | Metal &INOX | Cutting | Flat | Ø115 x 2.5 x 22.23 mm (4-1/2" x 1/10" x 7/8") | Pack 10 |
| DA10118 | Metal | Cutting | Flat | Ø115 x 3.0 x 22.23 mm (4-1/2" x 1/8" x 7/8") | Pack 10 |



FLAT

| Part No. | Material | Work Type | Type | Description | Pack QTY |
|----------|-------------|-----------|------|--|----------|
| DA10119 | Metal &INOX | Cutting | Flat | Ø125 x 1.0 x 22.23 mm (5" x 0.04" x 7/8") | Pack 10 |
| DA10120 | Metal &INOX | Cutting | Flat | Ø125 x 1.6 x 22.23 mm (5" x 1/16" x 7/8") | Pack 10 |
| DA10121 | Metal &INOX | Cutting | Flat | Ø125 x 2.5 x 22.23 mm (5" x 1/10" x 7/8") | Pack 10 |
| DA10122 | Metal | Cutting | Flat | Ø125 x 3.0 x 22.23 mm (5" x 1/8" x 7/8") | Pack 10 |
| DA10123 | Metal &INOX | Cutting | Flat | Ø180 x 1.6 x 22.23 mm (7" x 1/16" x 7/8") | Pack 5 |
| DA10124 | Metal | Cutting | Flat | Ø230 x 2.0 x 22.23 mm (9" x 1/12" x 7/8") | Pack 5 |
| DA10126 | Metal | Cutting | Flat | Ø355 x 3.0 x 25.4 mm (14" x 1/8" x 1") | Pack 5 |

Abrasive Depressed Thick Metal Cutting Disc



FEATURES

- High quality abrasive discs
bring safety, productivity in metalworking
- Two sides full sheets of fiberglass
For durability and safety
- Standard hub allows
For fast, tool-free wheel changes
- Proprietary aluminum oxide grain combination
Allows aggressive cutting & more cuts
- Cover a wide range of metal cutting applications
- Thick type wheel design



DEPRESSED

| Part No. | Material | Work Type | Type | Description | Pack QTY |
|----------|----------|-----------|-----------|---|----------|
| DA10012 | Metal | Cutting | Depressed | Ø115 x 3.0 x 22.23 mm (4-1/2" x 1/8" x 7/8") | Pack 10 |
| DA10013 | Metal | Cutting | Depressed | Ø125 x 3.0 x 22.23 mm (5" x 1/8" x 7/8") | Pack 10 |
| DA10014 | Metal | Cutting | Depressed | Ø180 x 3.0 x 22.23 mm (7" x 1/8" x 7/8") | Pack 10 |
| DA10015 | Metal | Cutting | Depressed | Ø230 x 3.0 x 22.23 mm (9" x 1/8" x 7/8") | Pack 10 |

Abrasive Flat Thin Cutting Disc



FEATURES

- High quality abrasive discs
bring safety, productivity in metalworking
- Two sides full sheets of fiberglass
For durability and safety
- Standard hub allows
For fast, tool-free wheel changes
- Proprietary aluminum oxide grain combination
Allows aggressive cutting & more cuts
- Thin wheel design for fast cutting
- Cover a wide range of metal cutting applications



DA10901-DA10902



DA10904-DA10905



FLAT

| Part No. | Material | Work Type | Type | Description | Pack QTY |
|----------|-------------|-----------|------|--|----------|
| DA10901 | Metal &INOX | Cutting | Flat | Ø115 x 1.0 x 22.23 mm (4-1/2" x 0.04" x 7/8") | Pack 10 |
| DA10902 | Metal &INOX | Cutting | Flat | Ø125 x 1.0 x 22.23 mm (5" x 0.04" x 7/8") | Pack 10 |

| Part No. | Material | Work Type | Type | Description | Pack QTY |
|----------|-------------|-----------|------|--|----------|
| DA10904 | Metal &INOX | Cutting | Flat | Ø115 x 1.0 x 22.23 mm (4-1/2" x 0.04" x 7/8") | Pack 50 |
| DA10905 | Metal &INOX | Cutting | Flat | Ø125 x 1.0 x 22.23 mm (5" x 0.04" x 7/8") | Pack 50 |

Abrasive Depressed Metal Grinding Wheel



FEATURES

- High quality abrasive discs
bring safety, productivity in metalworking
- Two sides full sheets of fiberglass
For durability and safety
- Standard hub allows
For fast, tool-free wheel changes
- Proprietary aluminum oxide grain combination
Allows aggressive cutting & more cuts
- Cover a wide range of metal cutting applications



DEPRESSED

| Part No. | Material | Work Type | Type | Description | Pack QTY |
|----------|----------|-----------|-----------|---|----------|
| DA10026 | Metal | Grinding | Depressed | Ø100 x 6.0 x 16 mm (4" x 1/4" x 5/8") | Pack 5 |
| DA10022 | Metal | Grinding | Depressed | Ø115 x 6.0 x 22.23 mm (4-1/2" x 1/4" x 7/8") | Pack 5 |
| DA10023 | Metal | Grinding | Depressed | Ø125 x 6.0 x 22.23 mm (5" x 1/4" x 7/8") | Pack 5 |
| DA10024 | Metal | Grinding | Depressed | Ø180 x 6.0 x 22.23 mm (7" x 1/4" x 7/8") | Pack 5 |
| DA10025 | Metal | Grinding | Depressed | Ø230 x 6.0 x 22.23 mm (9" x 1/4" x 7/8") | Pack 5 |

MULTI-CUTTER ACCESSORIES

UNIVERSAL FIT SYSTEM



Multi-Cutter Accessories

FEATURES

- **Titanium-coated bi-metal blades**
Titanium-coated bi-metal blades provides up to 3x longer working life
- **Universal fit**
Universal FIT system blade can fit almost all brands of oscillation tool



| Part No. | Description | Materials | Width | Pack QTY |
|----------|---|---|--------------|----------|
| DA12901 | Extended Life Plunge Cutting Blades, Bi-metal, Titanium Coating | Wood, Nails, Metal, Thin Sheet Metal, PVC | 32mm(1-1/4") | Pack 5 |



| Part No. | Description | Materials | Pack QTY |
|----------|---|----------------------------------|----------|
| DA12001 | Extended Life Segmented Saw Blade, HSS, For PVC, Titanium Coating tip | Wood, Nails, Metal, Drywall, PVC | Pack 1 |



Accessory And Attachment Combo

| Part No. | Description | Pack QTY |
|----------|--|----------------------|
| DA12902 | 5 x Plunge Cut Saw Blades (2 x Wood/Metal and plastic, 1 x Wood and Plastic, 1 x Wood with nails, 1 x Laminate), 1 x grout and mortar remover blade, 1 x segmented saw blade, 1x Flexible Scrape Blade | 8pcs Mixed Blade Set |



Multi-Cutter Accessories



| Part No. | Description | Pack QTY |
|----------|----------------------|----------|
| DA12002 | Detail Sanding Plate | Pack 1 |



30pcs Assorted

| Part No. | Description | Pack QTY |
|----------|--|----------|
| DA12003 | 30pcs Sanding Sheets, Hook&Loop System | Pack 30 |



| Part No. | Description | Materials | Pack QTY |
|----------|---------------------------|---|----------|
| DA12004 | Diamond Segment Saw Blade | Cutting edge for general purpose grout and mortar removal | Pack 1 |



| Part No. | Description | Materials | Pack QTY |
|----------|--------------------------|---|----------|
| DA12005 | Diamond Tri Carbide Rasp | Reduces Materials build-up and Clogging | Pack 1 |



| Part No. | Description | Materials | Pack QTY |
|----------|----------------------|---------------|----------|
| DA12006 | Flexible Scrape Blad | Flooring Work | Pack 1 |

NOTE

[illegible]